



ENERG
енергия · ενεργεια




NIBE

AMS 10-12 + HBS05



55 °C

35 °C



A++

A++



35 dB



58 dB

■ 13
■ **10**
■ 12
kW

■ 12
■ **12**
■ 12
kW



2019



811/2013




ENERG Y IJA
 енергия · ενεργεια IE IA

NIBE



AMS10-12 + HBS05 + VVM S320

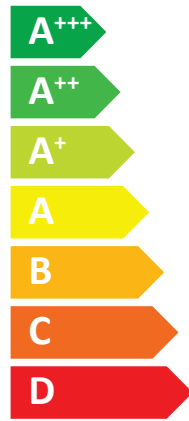

A++

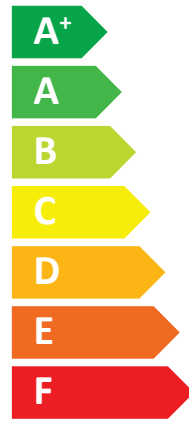

A



2019

811/2013



ENERG

енергия · ενεργεια

Y






IJA


IE


IA


NIBE


AMS10-12 + HBS05 + VVM S320









+ 

+ 

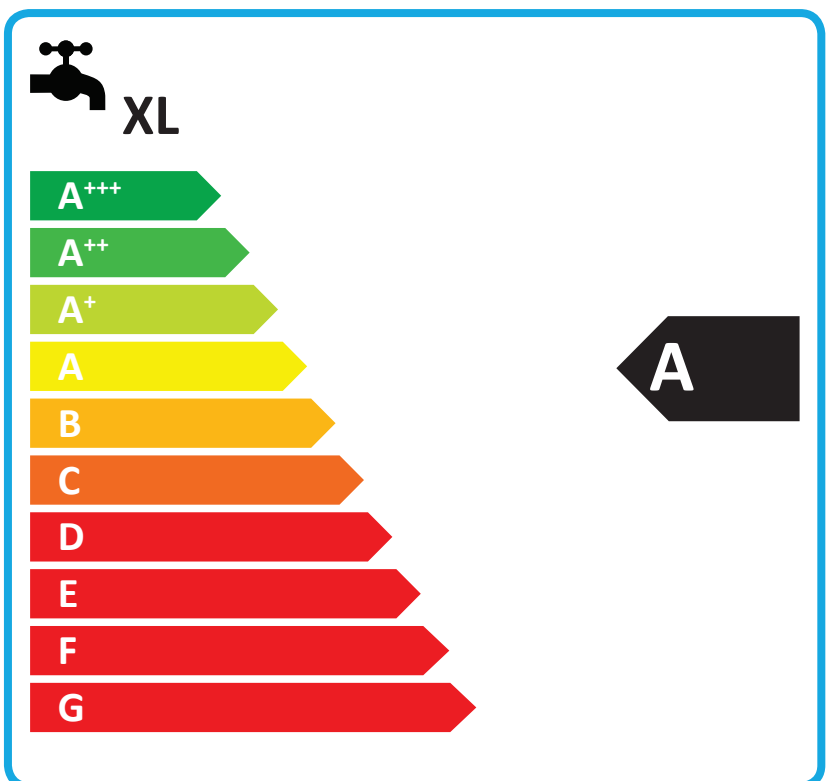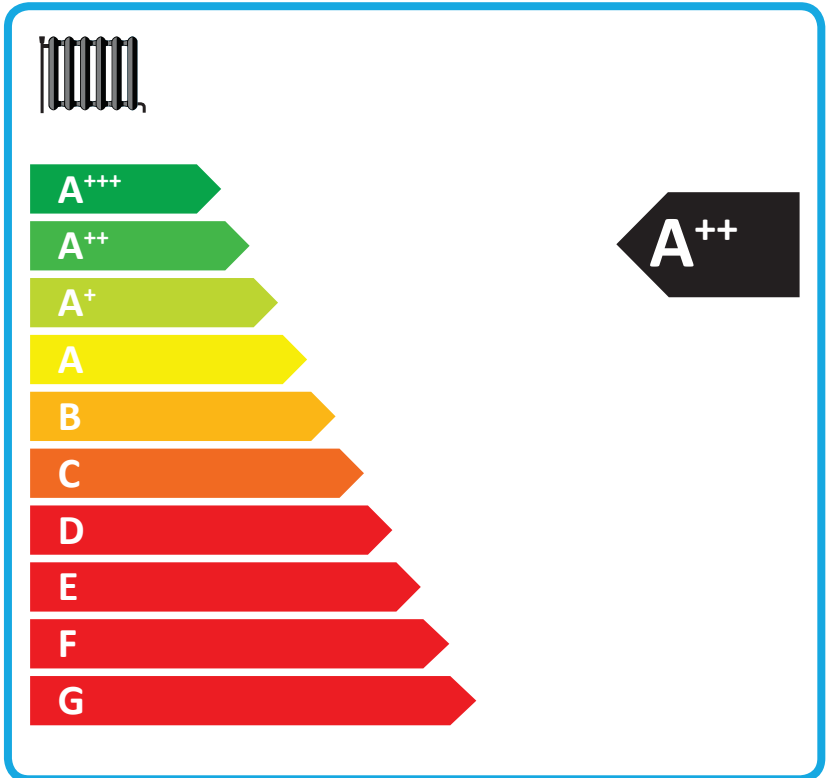+ 


+ 



Supplier's name:	NIBE		
Model:	NIBE AMS10-12+HBS05+VVM S320		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	57		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):		NIBE AMS10-12+HBS05+VVM S320										
Type of heat source/sink:		Air-to-water										
Low-temperature heat pump:		No										
Equipped with supplementary heater:		Yes										
Heat pump combination heater:		Yes										
Climate condition:		Average										
Temperature application:		Medium temperature (55 °C)										
Applied standards: EN14825 and EN16147												
Rated heat output		Prated	10,0	kW	Seasonal space heating energy efficiency		η_s	132	%			
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>								
Tj = -7 °C	Pdh	8,9	kW	Tj = -7 °C	COPd	1,99	-					
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C	COPd	3,22	-					
Tj = +7 °C	Pdh	3,5	kW	Tj = +7 °C	COPd	4,61	-					
Tj = +12 °C	Pdh	5,0	kW	Tj = +12 °C	COPd	6,25	-					
Tj = biv	Pdh	9,2	kW	Tj = biv	COPd	1,90	-					
Tj = TOL	Pdh	8,1	kW	Tj = TOL	COPd	1,92	-					
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-					
Bivalent temperature				T _{biv}	-7,9	°C	Operation limit temperature			TOL	-10	°C
Cycling interval capacity for heating				P _{cyc}		kW	Cycling interval efficiency			COP _{cyc}		-
Degradation co-efficient				C _{dh}	0,98	-	Heating water operating limit			WTOL	58	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>								
Off mode		P _{OFF}	0,002	kW	Rated heat output		P _{sup}	1,9	kW			
Thermostat-off mode		P _{TO}	0,014	kW	Type of energy input		Electric					
Standby mode		P _{SB}	0,015	kW								
Crankcase heater mode		P _{CK}	0,035	kW								
<i>Other items</i>												
Capacity control		variable		Rated air flow rate, outdoors			4380	m ³ /h				
Sound power level, indoors/outdoors		L _{WA}	35/58	dB	Rated water flow rate, indoor heat exchanger			0,86	m ³ /h			
Annual energy consumption		Q _{HE}	6136	kWh	Rated brine or water flow rate, outdoor heat exchanger				m ³ /h			
<i>For heat pump combination heater:</i>												
Declared load profile		XL		Water heating energy efficiency		η_{wh}	98	%				
Daily electricity consumption		Q _{elec}	7,75	kWh	Daily fuel consumption		Q _{fuel}		kWh			
Annual electricity consumption		AEC	1702	kWh	Annual fuel consumption		AFC		GJ			
Approved by:												
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden										