



**ENERG**  
енергия · ενέργεια



**NIBE**

AMS10-12



55 °C

35 °C



**A++**

**A++**

**35 dB**

**58 dB**

■ 13	■ 12
■ <b>10</b>	■ <b>12</b>
■ 12	■ 12
kW	kW

2019

811/2013



**ENERG**  
енергия · ενεργεια



**NIBE**

AMS10-12 + SHK200S





**55°C**



**A++**



**A**

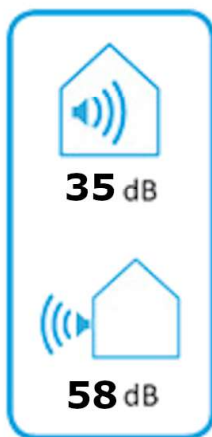

2019

811/2013



**ENERG**  
енергия · ενέργεια



**NIBE**

AMS10-12



**A<sup>++</sup>**

**A<sup>+++</sup>**

**A<sup>++</sup>**

**A<sup>++</sup>**

**A<sup>+</sup>**

**A**

**B**

**C**

**D**

**E**

**F**

**G**

+



+



+



+











**ENERG**  
енергия · ενέργεια







**NIBE**


AMS10-12 + SHK200S



























Supplier's name:	<b>NIBE</b>		
Model:	<b>AMS 10-12 + SHK 200S</b>		
Temperature application	<b>35</b>	<b>55</b>	°C
Declared load profile for water heating	<b>XL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	11.5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	58		dB

### Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

<b>Model(s):</b>				<b>AMS 10-12 + SHK 200S</b>									
Type of heat source/sink:				Air-to-water									
Low-temperature heat pump:				No									
Equipped with supplementary heater:				Yes									
Heat pump combination heater:				Yes									
Climate condition:				Average									
Temperature application:				Medium temperature (55 °C)									
Applied standards: EN14825, EN16147													
<b>Rated heat output</b>				Prated	10,0	kW		<b>Seasonal space heating energy efficiency</b>					
								$\eta_s$	132	%			
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C	Pdh	8,9	kW		Tj = -7 °C	COPd	1,99	kW					
Tj = +2 °C	Pdh	5,5	kW		Tj = +2 °C	COPd	3,22	kW					
Tj = +7 °C	Pdh	3,5	kW		Tj = +7 °C	COPd	4,61	kW					
Tj = +12 °C	Pdh	5,0	kW		Tj = +12 °C	COPd	6,25	kW					
Tj = biv	Pdh	9,2	kW		Tj = biv	COPd	1,90	kW					
Tj = TOL	Pdh	8,1	kW		Tj = TOL	COPd	1,92	kW					
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		kW					
Bivalent temperature	T <sub>biv</sub>	-7,9	°C		Operation limit temperature	TOL	-10	°C					
Cycling interval capacity for heating	P <sub>ych</sub>		kW		Cycling interval efficiency	COP <sub>yc</sub>		-					
Degradation co-efficient	C <sub>dh</sub>	0,98	-		Heating water operating limit	WTOL	58	°C					
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>					
Off mode	P <sub>OFF</sub>	0,002	kW		Rated heat output	P <sub>sup</sub>	1,9	kW					
Thermostat-off mode	P <sub>TO</sub>	0,014	kW										
Standby mode	P <sub>SB</sub>	0,015	kW		Type of energy input	Electric							
Crankcase heater mode	P <sub>CK</sub>	0,035	kW										
<i>Other items</i>													
Capacity control	variable							Rated air flow rate, outdoors		4380	m <sup>3</sup> /h		
Sound power level, indoors/outdoors	L <sub>WA</sub>	35/58	dB						Rated water flow rate, indoor heat exchanger		0,86	m <sup>3</sup> /h	
Annual energy consumption	Q <sub>HE</sub>	6136	kWh						Rated brine or water flow rate, outdoor heat exchanger			m <sup>3</sup> /h	
<i>For heat pump combination heater:</i>													
<b>Declared load profile</b>								<b>Water heating energy efficiency</b>					
								$\eta_{wh}$	98	%			
Daily electricity consumption	Q <sub>elec</sub>	7,75	kWh						Daily fuel consumption	Q <sub>fuel</sub>		kWh	
Annual electricity consumption	AEC	1702	kWh						Annual fuel consumption	AFC		GJ	
<b>Approved by:</b>													
<b>Contact details</b>				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden									