



ENERG
енергия · ενέργεια



NIBE

AMS10-6



55 °C

35 °C



A++

A+++



35 dB



51 dB

■ 6
■ 5
■ 5
kW

■ 4
■ 5
■ 4
kW



2019

811/2013



ENERG
енергия · ενεργεια



NIBE

AMS10-6 + SHK200S-6



55°C




XL



A++



A

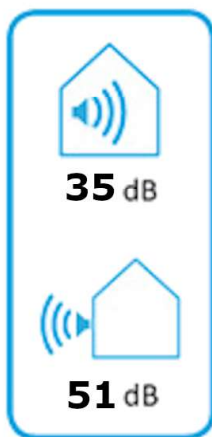

2019

811/2013



ENERG
енергия · ενέργεια





NIBE


AMS10-6





 



 +


 +


 +


 +


 A+++


 A++ 


 A+


 A


 B

 C

 D

 E

 F

 G




ENERG
енергия · ενεργεια

Y IJA
IE IA

NIBE


AMS10-6 + SHK200S-6

Icons for energy efficiency features: a radiator, a black arrow pointing left with the letter 'B', a radiator icon, a black arrow pointing left with the letter 'A', and a tap icon with 'XL' next to it.

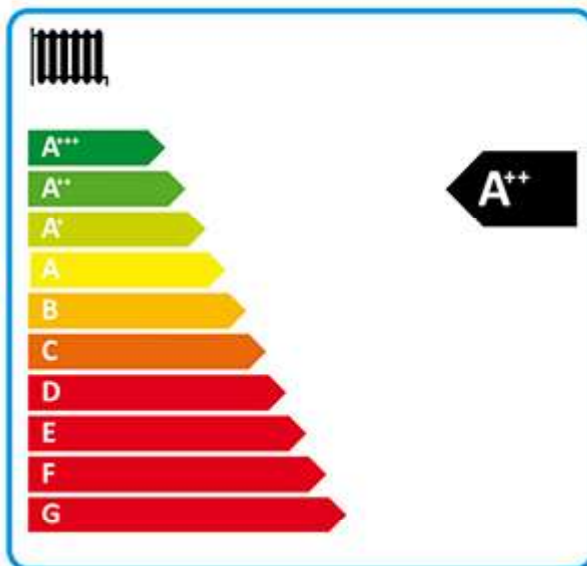

Feature selection area with four rows, each containing a plus sign, an icon, and a checkbox:


- Icon: Solar panel with sun. Checkbox:
- Icon: Water tank. Checkbox:
- Icon: Hand pointing to a keypad. Checkbox:
- Icon: Radiator. Checkbox:

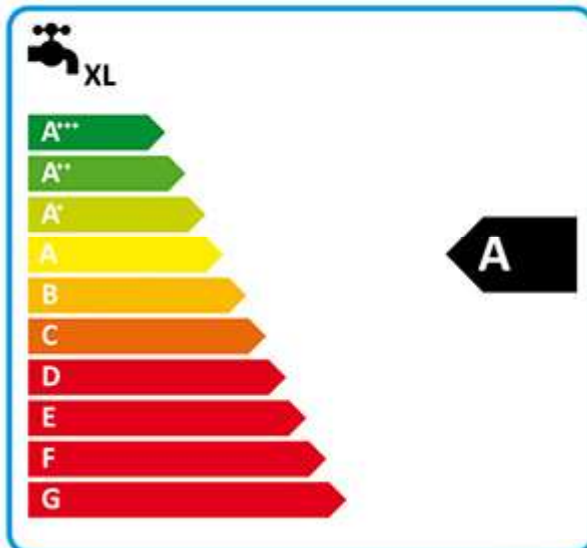

Supplier's name:	NIBE		
Model:	AMS 10-6 + SHK 200S-6		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	5	5	kW
Annual energy consumption for space heating, average climate	2089	3248	kWh
Annual electricity consumption for water heating, average climate			kWh
Seasonal space heating energy efficiency, average climate:	188	131	%
Water heating energy efficiency, average climate:	99		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	4	6	kW
Rated heat output, warm climate:	4	5	kW
Annual energy consumption for space heating, cold climate	2694	4610	kWh
Annual electricity consumption for water heating, cold climate			kWh
Annual energy consumption for space heating, warm climate	872	1398	kWh
Annual electricity consumption for water heating, warm climate			kWh
Seasonal space heating energy efficiency, cold climate:	143	116	%
Water heating energy efficiency, cold climate:			%
Seasonal space heating energy efficiency, warm climate:	252	179	%
Water heating energy efficiency, warm climate:			%
Sound power level LWA outdoors	51		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	192	135	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	147	120	%
Seasonal space heating energy efficiency of package, warm climate:	256	183	%

Model(s):	AMS 10-6 + SHK 200S-6						
Type of heat source/sink:	Air-to-water						
Low-temperature heat pump:	No						
Equipped with supplementary heater:	Yes						
Heat pump combination heater:	Yes						
Climate condition:	Average						
Temperature application:	Medium temperature (55 °C)						
Applied standards: EN14825, EN16147							
Rated heat output	Prated	5,3	kW	Seasonal space heating energy efficiency	η_s	131	%
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>			
Tj = -7 °C	Pdh	4,7	kW	Tj = -7 °C	COPd	1,88	kW
Tj = +2 °C	Pdh	2,8	kW	Tj = +2 °C	COPd	3,26	kW
Tj = +7 °C	Pdh	1,8	kW	Tj = +7 °C	COPd	4,72	kW
Tj = +12 °C	Pdh	2,7	kW	Tj = +12 °C	COPd	6,47	kW
Tj = biv	Pdh	4,7	kW	Tj = biv	COPd	1,88	kW
Tj = TOL	Pdh	4,1	kW	Tj = TOL	COPd	1,77	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	P _{ych}		kW	Cycling interval efficiency	COP _{yc}		-
Degradation co-efficient	C _{dh}	0,99	-	Heating water operating limit	WTOL	58	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>			
Off mode	P _{OFF}	0,007	kW	Rated heat output	P _{sup}	1,2	kW
Thermostat-off mode	P _{TO}	0,012	kW				
Standby mode	P _{SB}	0,012	kW	Type of energy input	Electric		
Crankcase heater mode	P _{CK}	0	kW				
<i>Other items</i>							
Capacity control	variable			Rated air flow rate, outdoors		2526	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	35/51	dB	Rated water flow rate, indoor heat exchanger			m ³ /h
Annual energy consumption	Q _{HE}	3248	kWh	Rated brine or water flow rate, outdoor heat exchanger			m ³ /h
<i>For heat pump combination heater:</i>							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	99	%
Daily electricity consumption	Q _{elec}		kWh	Daily fuel consumption	Q _{fuel}		kWh
Annual electricity consumption	AEC		kWh	Annual fuel consumption	AFC		GJ
Approved by:							
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden			