




# ENERG

енергия · ενεργεια



## NIBE

## DVC 10-50L

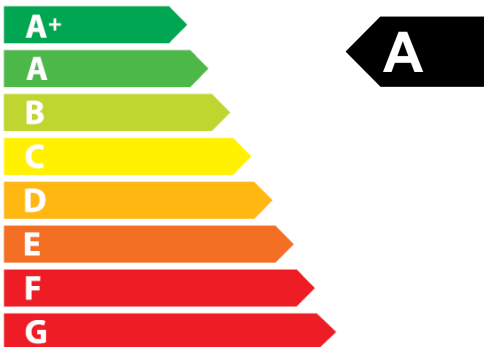

**38**  
dB



**25 m<sup>3</sup>/h**



Trade mark	NIBE					
Model	DVC 10-50L					
Specific energy consumption (SEC), kWh/(m <sup>2</sup> .a)	Cold		Average		Warm	
	-80,6	A+	-38,8	A	-14,8	E
Type of ventilation unit	Bidirectional					
Type of drive installed	3-speed					
Type of heat recovery system	Regenerative					
Thermal efficiency of heat recovery, %	77					
Maximum flow rate, m <sup>3</sup> /h	25					
Electric power input, W	5,2					
Sound power level, dB(A)	38					
Reference flow rate, m <sup>3</sup> /s	0,004					
Reference pressure difference, Pa	N/A					
Specific power input (SPI), W/(m <sup>3</sup> /h)	0,277					
Control typology	Local demand control					
Maximum internal leakage rates, %	2,7					
Maximum external leakage rates, %	N/A					
Mixing rate of bidirectional units, %	1					
Airflow sensitivity at +20 Pa and -20 Pa	0,2					
The indoor/outdoor air tightness, m <sup>3</sup> /h	5,2					
Internet address	www.nibe.eu					
The annual electricity consumption (AEC), kWh electricity/a	Cold		Average		Warm	
	200		200		200	
The annual heating saved (AHS), kWh primary energy/a	Cold		Average		Warm	
	8 562		4 377		1 979	