




ENERG
енергия · ενεργεια



NIBE

GV-HR 130-250



46
dB



258 m³/h



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2016

1254/2014

Technical Product Fiche

Suppliers name	NIBE
Model identification	GV-HR 130-250
Specific energy consumption SEC kWh/(m ² *a) for: cold, average, warm climates	SECcold: -74,0 ; SECaverage : -37,2 ; SECwarm: -13,5
RVU/NRVU/Unidirectional / Bidirectional	RVU - Bidirectional
Type of drive installed	EC motor with 0-100 % modulation range
Type of heat recovery (recuperative, regenerative, non)	Recuperative
Thermal efficiency of heat recovery %	82
Maximum airflow (m ³ /h)	258
Electric Power input of fan drive at maximum airflow - W	116
Sound Power level (Lwa) at reference airflow Lwa	46
Reference airflow rate (m ³ /s)	0,05
Reference pressure difference (min. 50Pa) – (Pa)	50
Specific power input at reference airflow – SEL/SPI (W/ m ³ /h)	0,288
Control factor	0,85
Declared maximum internal and external leakage rates (%)	Internal: 2,5% ; External: 1,6%
Mixing rate of non ducted bidirectional ventilation units	Not applicable
Position and description of visual filter warning	After a specific time the display will tell that it is time to clean the filters or replace them with new ones.
Instructions for installing supply/exhaust grilles i facade for unidirectional devices	Not applicable
Internet adress for pre-/disassembly instructions	www.nibe.eu (manual)
Sensitivity for pressure variation for units without ducts + and - 20Pa	Not applicable
For non ducted units - the indoor/outdoor air tightness in (m ³ /h)	Not applicable
The annual electricity consumption AEC per 100 m ² (kWh electricity /a) for climates : Average, Warm, Cold	AECcold=842 ; AECaverage=305 ; AECwarm=260
The annual heating saved AHS in primary energy (kWh prim/a) per 100 m ² for climates : Average, Warm, Cold	AHScold=8633 ; AHSaverage=4413 AHSwarm=1996




ENERG
енергия · ενεργεια



NIBE

GV-HR 130-150

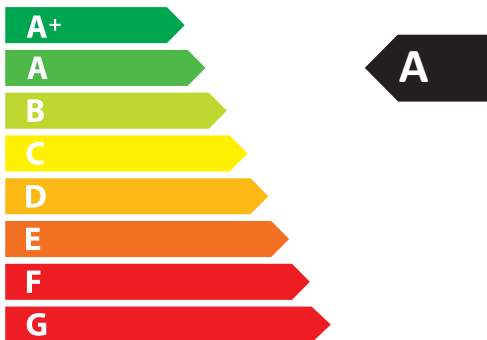

41
dB



165 m³/h



ENERGIA · ЕНЕРГИЯ · ΕΝΕΡΓΕΙΑ · ENERGIJA · ENERGY · ENERGIE · ENERGI

2016

1254/2014

Technical Product Fiche

Suppliers name	NIBE
Model identification	GV-HR 130-150
Specific energy consumption SEC kWh/(m ² *a) for: cold, average, warm climates	SECcold: -78,2 ; SECaverage : -40,1 ; SECwarm: -15,6
RVU/NRVU/Unidirectional / Bidirectional	RVU - Bidirectional
Type of drive installed	EC motor with 0-100 % modulation range
Type of heat recovery (recuperative, regenerative, non)	Recuperative
Thermal efficiency of heat recovery %	87
Maximum airflow (m ³ /h)	165
Electric Power input of fan drive at maximum airflow - W	55,8
Sound Power level (Lwa) at reference airflow Lwa	41
Reference airflow rate (m ³ /s)	0,032
Reference pressure difference (min. 50Pa) – (Pa)	50
Specific power input at reference airflow – SEL/SPI (W/ m ³ /h)	0,219
Control factor	0,85
Declared maximum internal and external leakage rates (%)	Internal: 4,3% ; External: 2,8%
Mixing rate of non ducted bidirectional ventilation units	Not applicable
Position and description of visual filter warning	After a specific time the display will tell that it is time to clean the filters or replace them with new ones.
Instructions for installing supply/exhaust grilles i facade for unidirectional devices	Not applicable
Internet adress for pre-/disassembly instructions	www.nibe.eu (manual)
Sensitivity for pressure variation for units without ducts + and - 20Pa	Not applicable
For non ducted units - the indoor/outdoor air tightness in (m ³ /h)	Not applicable
The annual electricity consumption AEC per 100 m ² (kWh electricity /a) for climates : Average, Warm, Cold	AECcold=781 ; AECaverage=244 ; AECwarm=199
The annual heating saved AHS in primary energy (kWh prim/a) per 100 m ² for climates : Average, Warm, Cold	AHScold=8898 ; AHSaverage=4548 AHSwarm=2057