



**ENERG** Y IJA  
 енергия · ενεργεια IE IA

**NIBE** NIBE F1145-6



55 °C

35 °C



**A++**

**A+++**



**42** dB



dB



2019


811/2013




**ENERG** Y IJA  
 енергия · ενεργεια IE IA



NIBE F1145-6 + VPB300

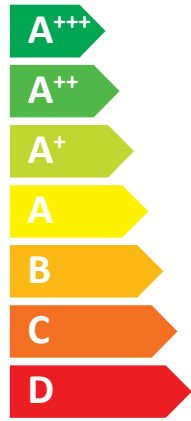

A<sup>++</sup>

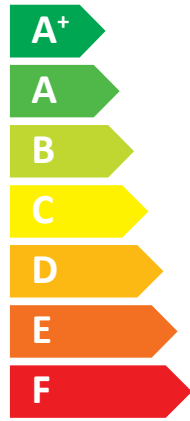

A

42 dB

dB



- 7 kW
- 7 kW
- 7 kW

2019

811/2013



# ENERG

енергия · ενέργεια

Y






IJA

IE




IA


**NIBE**


## NIBE F1145-6 + VPB300









XXL






+ 



+ 

+ 

+ 




XXL

Supplier's name:	<b>NIBE</b>		
Model:	<b>NIBE F1145-6 (+VPB 300)</b>		
Temperature application	35	55	°C
Declared load profile for water heating	<b>XXL</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A+++</b>	<b>A++</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	7	7	kW
Annual energy consumption for space heating, average climate	3151	3640	kWh
Annual electricity consumption for water heating, average climate	2025		kWh
Seasonal space heating energy efficiency, average climate:	178	140	%
Water heating energy efficiency, average climate:	106		%
Sound power level LWA indoors	42		dB
Rated heat output, cold climate:	7	7	kW
Rated heat output, warm climate:	7	7	kW
Annual energy consumption for space heating, cold climate	3577	4201	kWh
Annual electricity consumption for water heating, cold climate	2025		kWh
Annual energy consumption for space heating, warm climate	2080	2447	kWh
Annual electricity consumption for water heating, warm climate	2025		kWh
Seasonal space heating energy efficiency, cold climate:	185	145	%
Water heating energy efficiency, cold climate:	106		%
Seasonal space heating energy efficiency, warm climate:	177	138	%
Water heating energy efficiency, warm climate:	106		%
Sound power level LWA outdoors	-		dB

### Data for package fiche

Controller class	VII		
Controller contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	182	143	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	188	148	%
Seasonal space heating energy efficiency of package, warm climate:	181	142	%

<b>Model(s):</b>		<b>NIBE F1145-6 + VPB300</b>										
Type of heat source/sink:		Brine-to-water										
Low-temperature heat pump:		No										
Equipped with supplementary heater:		Yes										
Heat pump combination heater:		Yes										
Climate condition:		Average										
Temperature application:		Medium temperature (55 °C)										
Applied standards: EN14825, EN16147 and EN12102												
<b>Rated heat output</b>		Prated	6,50	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	140	%			
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>								
Tj = -7 °C	Pdh	5,3	kW	Tj = -7 °C	COPd	3,16	kW					
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C	COPd	3,75	kW					
Tj = +7 °C	Pdh	5,6	kW	Tj = +7 °C	COPd	4,12	kW					
Tj = +12 °C	Pdh	5,8	kW	Tj = +12 °C	COPd	4,53	kW					
Tj = biv	Pdh	5,4	kW	Tj = biv	COPd	3,32	kW					
Tj = TOL	Pdh	5,2	kW	Tj = TOL	COPd	2,93	kW					
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW					
Bivalent temperature				T <sub>biv</sub>	-5	°C	Operation limit temperature			TOL	-10	°C
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency			COP <sub>cyh</sub>		-
Degradation co-efficient				Cdh	1,00	-	Heating water operating limit			WTOL	65	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>								
Off mode	P <sub>OFF</sub>	0,002	kW	Rated heat output		P <sub>sup</sub>	1,3	kW				
Thermostat-off mode	P <sub>TO</sub>	0	kW	Type of energy input		Electric						
Standby mode	P <sub>SB</sub>	0,007	kW									
Crankcase heater mode	P <sub>CK</sub>	0,014	kW									
<i>Other items</i>												
Capacity control				fixed								
Sound power level, indoors/outdoors				L <sub>WA</sub>	42/-	dB	Rated air flow rate, outdoors					
Annual energy consumption				Q <sub>HE</sub>	3640	kWh	Rated water flow rate, indoor heat exchanger		0,56 m <sup>3</sup> /h			
							Rated brine or water flow rate, outdoor heat exchanger		0,99 m <sup>3</sup> /h			
<i>For heat pump combination heater:</i>												
<b>Declared load profile</b>		<b>XXL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	106	%				
Daily electricity consumption		Q <sub>elec</sub>	9,22	kWh	Daily fuel consumption		Q <sub>fuel</sub>		kWh			
Annual electricity consumption		AEC	2025	kWh	Annual fuel consumption		AFC		GJ			
<b>Approved by:</b>												
<b>Contact details</b>		<b>© NIBE Energy Systems - Box 14 - Hannabadvägen 5 - 28521 Markaryd - Sweden</b>										