

ENERGY						
	IIBE F2040-12					
	55 °C	35 °C				
A*** A** A* A B C D	A++	A ++				
\square	1 3	1 2				
(())	10	12				
dB	kW	kW				
((() 57 dB						
2019 811/2013						

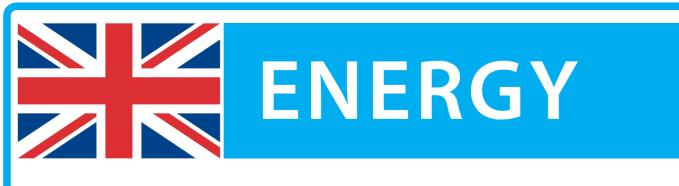

♦NIBE

NIBE F2040-12 + SMO

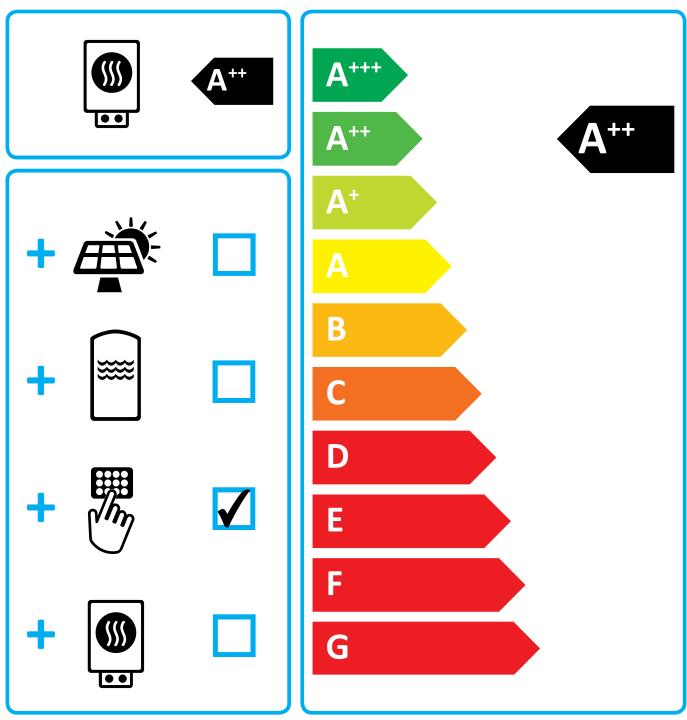

Supplier's name:	Ν		
Model:	NIBE F2040		
Temperature application	35	55	°C
Declared load profile for water			
heating			
Seasonal space heating energy	A++	A++	
efficiency class, average climate:	A++	A++	
Water heating energy efficiency			
class, average climate:			
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for			
space heating, average climate	5382	6136	kWh
Annual electricity consumption for		•	
water heating, average climate			kWh
Seasonal space heating energy			
efficiency, average climate:	174	132	%
Water heating energy efficiency,			
average climate:			%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for	7700	44407	1.3.4./5
space heating, cold climate	7798	11197	kWh
Annual electricity consumption for			kWh
water heating, cold climate			KVVII
Annual energy consumption for	2759	3419	kWh
space heating, warm climate	2159	5419	K V V I I
Annual electricity consumption for			kWh
water heating, warm climate		1	
Seasonal space heating energy	142	111	%
efficiency, cold climate:			
Water heating energy efficiency, cold climate:			%
Seasonal space heating energy			
efficiency, warm climate:	229	185	%
Water heating energy efficiency,			+
warm climate:			%
Sound power level LWA outdoors	Ę	57	dB
		-	<u> </u>

Data for package fiche

Controller class	V		
Controler contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):		N	BE F2040	-12+ SMO			
Type of heat source/sink:			Air-to	p-water			
Low-temperature heat pump: Equipped with supplementary heater: Heat pump combination heater: Climate condition:				No 🔶 🔶			
			1				
				Yes			4
				erage			•
Temperature application:		Me	dium tem	perature (55 °C)			
Applied standards: EN14825 and EN16147							
Rated heat output	Prated	10,0	kW	Seasonal space heating energy efficiency	η _s	132	%
Declared capacity for part load at outdoor temp	erature Ti			Declared coefficient of performance for part	load at outdo	or temperat	ture Ti
Ti = -7 °C	Pdh	8,9	kW	Ti = -7 °C	COPd	1,99	-
Tj = +2 °C	Pdh	5,5	kW	$T_i = +2 °C$	COPd	3,22	-
Tj = +7 °C	Pdh	3,5	kW	$T_i = +7 °C$	COPd	4,61	-
Tj = +12 °C	Pdh	5,0	kW	Tj = +12 °C	COPd	6,25	-
Tj = biv	Pdh	9,2	kW	Ti = biv	COPd	1,90	-
Tj = TOL	Pdh	8,1	kW	Ti = TOL	COPd	1,92	-
Tj = -15 °C (if TOL < -20 °C)	Pdh	-,	kW	Tj = -15 °C (if TOL < -20 °C)	COPd	7-	-
Bivalent temperature	T _{biv}	-7,9	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency	COPcyc		-
Degradation co-efficient	Cdh	0,98	-	Heating water operating limit	WTOL	58	°C
Power consumption in modes other than active	mode			Supplementary heater			
Off mode	P _{OFF}	0,002	kW	Rated heat output	Psup	1,9	kW
Thermostat-off mode	P _{TO}	0,014	kW			_,-	
		,	kW	Turne of one row input			
Standby mode Crankcase heater mode	P _{SB} P _{CK}	0,015 0,035	kW	Type of energy input Electric			
	F CK	0,035	ĸvv				
Other items							
Capacity control		variable		Rated air flow rate, outdoors		4380	m³/h
		(Rated water flow rate, indoor heat			3/1-
Sound power level, indoors/outdoors	L _{WA}	35/57	dB	exchanger		0,86	m³/h
				Rated brine or water flow rate,			
Annual energy consumption	Q _{HE}	6136	kWh	outdoor heat exchanger			m³/h
For heat pump combination heater:							
Declared load profile				Water heating energy efficiency	η_{wh}		%
Daily electricity consumption	Q _{elec}		kWh	Daily fuel consumption	Q _{fuel}		kWh
Annual electricity consumption	AEC		kWh	Annual fuel consumption	AFC		GJ
Approved by:					AIC		- 00
Contact details		norau Sua	tome D	ox 14 - Hannabadsvägen 5 - 28521 Ma	rkanud G	vodon	