




**ENERG**  
енергия · ενεργεια




**NIBE**

NIBE F470



55 °C

35 °C

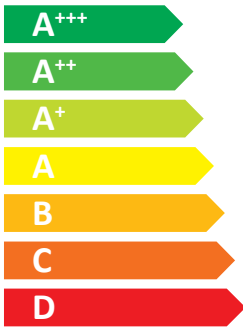

**A+**

**A+**



**52** dB



dB

■ 3  
■ **3**  
■ 3  
kW

■ 3  
■ **3**  
■ 3  
kW



2019

811/2013





**ENERG**  
енергия · ενέργεια




**NIBE**



NIBE F470

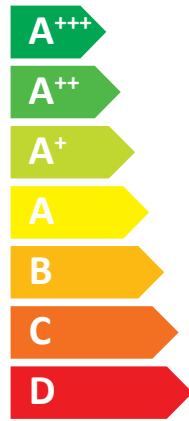

A+

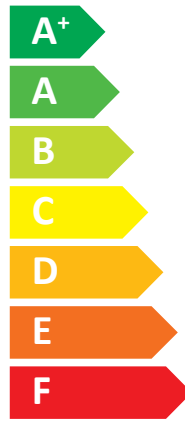

A

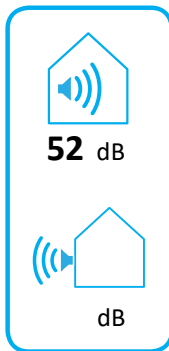

2019

811/2013



# ENERG

енергия · ενέργεια

Y






IJA


IE


IA


**NIBE**


## NIBE F470









+ 

+ 

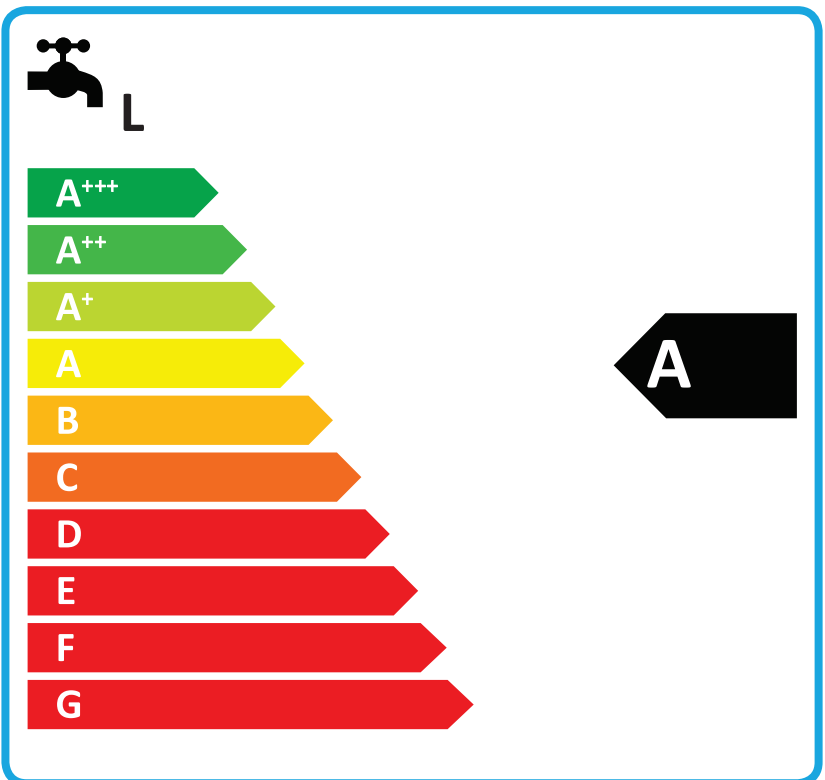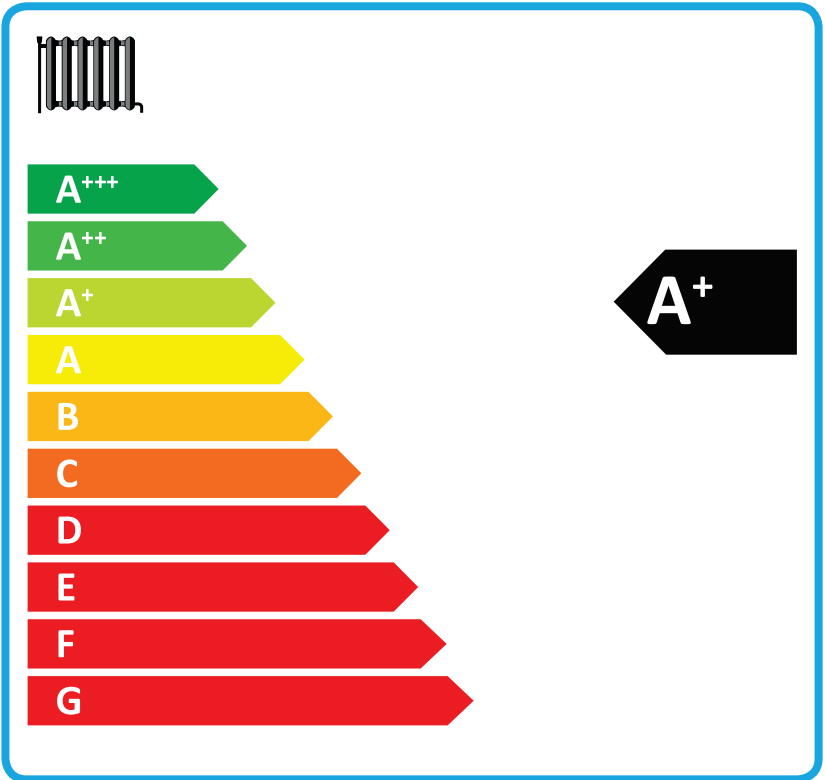+ 


+ 



Supplier's name:	<b>NIBE</b>		
Model:	<b>F470</b>		
Temperature application	35	55	°C
Declared load profile for water heating	<b>L</b>		
Seasonal space heating energy efficiency class, average climate:	<b>A+</b>	<b>A+</b>	
Water heating energy efficiency class, average climate:	<b>A</b>		
Rated heat output, average climate:	3	3	kW
Annual energy consumption for space heating, average climate	1505	1806	kWh
Annual electricity consumption for water heating, average climate	1299		kWh
Seasonal space heating energy efficiency, average climate:	140	116	%
Water heating energy efficiency, average climate:	79		%
Sound power level LWA indoors	52		dB
Rated heat output, cold climate:	3	3	kW
Rated heat output, warm climate:	3	3	kW
Annual energy consumption for space heating, cold climate	1737	2091	kWh
Annual electricity consumption for water heating, cold climate	1299		kWh
Annual energy consumption for space heating, warm climate	973	1168	kWh
Annual electricity consumption for water heating, warm climate	1299		kWh
Seasonal space heating energy efficiency, cold climate:	145	120	%
Water heating energy efficiency, cold climate:	79		%
Seasonal space heating energy efficiency, warm climate:	140	116	%
Water heating energy efficiency, warm climate:	79		%
Sound power level LWA outdoors	-		dB

#### Data for package fiche

Controller class	<b>VII</b>		
Controller contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	143	119	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+</b>	<b>A+</b>	%
Seasonal space heating energy efficiency of package, cold climate:	148	123	%
Seasonal space heating energy efficiency of package, warm climate:	143	119	%

<b>Model(s):</b>				<b>F470</b>										
Type of heat source/sink:				Exhaust air-to-water										
Low-temperature heat pump:				No										
Equipped with supplementary heater:				Yes										
Heat pump combination heater:				Yes										
Climate condition:				Average										
Temperature application:				Medium temperature (55 °C)										
Applied standards: EN14825 and EN16147														
<b>Rated heat output</b>				Prated	2,6	kW		<b>Seasonal space heating energy efficiency</b>						
								$\eta_s$	116	%				
<i>Declared capacity for part load at outdoor temperature Tj</i>						<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>								
Tj = -7 °C	Pdh	1,7	kW		Tj = -7 °C	COPd	2,72			-				
Tj = +2 °C	Pdh	1,7	kW		Tj = +2 °C	COPd	3,22			-				
Tj = +7 °C	Pdh	1,7	kW		Tj = +7 °C	COPd	3,37			-				
Tj = +12 °C	Pdh	1,7	kW		Tj = +12 °C	COPd	3,28			-				
Tj = biv	Pdh	1,7	kW		Tj = biv	COPd	3,04			-				
Tj = TOL	Pdh	1,7	kW		Tj = TOL	COPd	2,56			-				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd				-				
Bivalent temperature				T <sub>biv</sub>	-1,6	°C		Operation limit temperature						
Cycling interval capacity for heating				P <sub>cyh</sub>		kW		Cycling interval efficiency						
Degradation co-efficient				Cdh	0,96	-		Heating water operating limit temperature						
								WTOL	58	°C				
<i>Power consumption in modes other than active mode</i>						<i>Supplementary heater</i>								
Off mode	P <sub>OFF</sub>	0,002	kW		Rated heat output				P <sub>sup</sub>	0,9	kW			
Thermostat-off mode	P <sub>TO</sub>	0,02	kW											
Standby mode	P <sub>SB</sub>	0,015	kW		Type of energy input				Electric					
Crankcase heater mode	P <sub>CK</sub>	0	kW											
<i>Other items</i>														
Capacity control				fixed		Rated air flow rate, outdoors				150	m <sup>3</sup> /h			
Sound power level, indoors/outdoors				L <sub>WA</sub>	52/-	dB		Rated water flow rate, indoor heat exchanger				0,18	m <sup>3</sup> /h	
Annual energy consumption				Q <sub>HE</sub>	1806	kWh		Rated brine or water flow rate, outdoor heat exchanger					m <sup>3</sup> /h	
<i>For heat pump combination heater:</i>														
<b>Declared load profile</b>				L		<b>Water heating energy efficiency</b>				$\eta_{wh}$	79	%		
Daily electricity consumption				Q <sub>elec</sub>	5,92	kWh		Daily fuel consumption				Q <sub>fuel</sub>	kWh	
Annual electricity consumption				AEC	1299	kWh		Annual fuel consumption				AFC	GJ	
<b>Approved by:</b>														
<b>Contact details</b>				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden										