






ENERG Y UA EHEPΓИЯ · ενεργεια IE IA



NIBE S1155-12 W/W + VPB S300

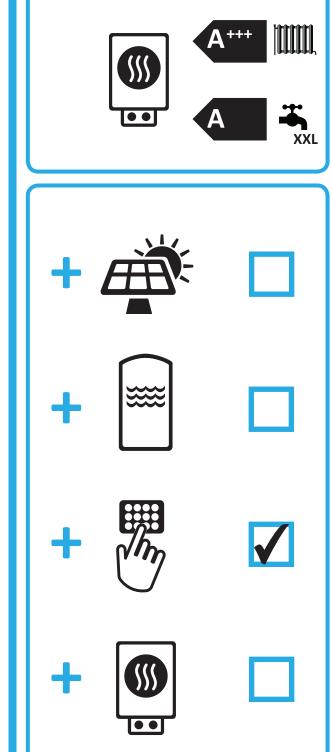

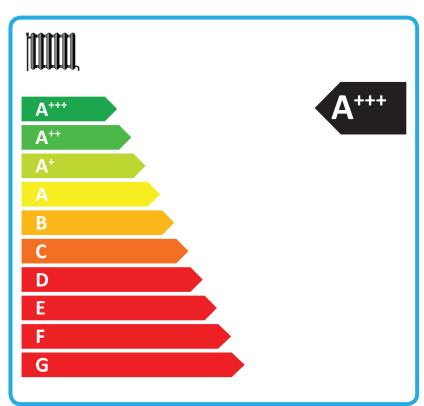

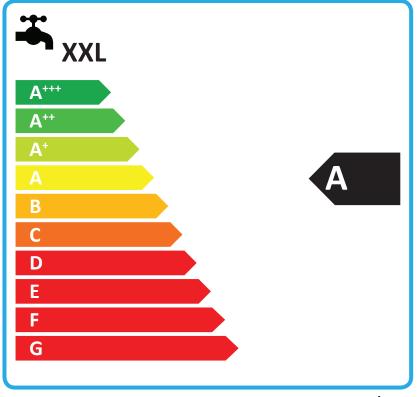

2015

Product fiche

Supplier's name:	NI		
Model:	NIBE S1155-12		
Temperature application	35	55	°C
Declared load profile for water heating	X		
Seasonal space heating energy efficiency class, average climate:	A+++	A+++	
Water heating energy efficiency class, average climate:	1		
Rated heat output, average climate:	14	14	kW
Annual energy consumption for space heating, average climate	4433	5657	kWh
Annual electricity consumption for water heating, average climate	18	kWh	
Seasonal space heating energy efficiency, average climate:	253	197	%
Water heating energy efficiency, average climate:	1	%	
Sound power level LWA indoors	44	44	dB
Rated heat output, cold climate:	14	14	kW
Rated heat output, warm climate:	14	14	kW
Annual energy consumption for space heating, cold climate	5091	6497	kWh
Annual electricity consumption for water heating, cold climate	1837		kWh
Annual energy consumption for space heating, warm climate	2823	3613	kWh
Annual electricity consumption for water heating, warm climate	1837		kWh
Seasonal space heating energy efficiency, cold climate:	263	204	%
Water heating energy efficiency, cold climate:	117		%
Seasonal space heating energy efficiency, warm climate:	257	199	%
Water heating energy efficiency, warm climate:	117		%
Sound power level LWA outdoors	-	-	dB

Data for package fiche

Controller class	\		
Controler contribution to efficiency	•	%	
Seasonal space heating energy efficiency of package, average climate:	257	201	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	267	208	%
Seasonal space heating energy efficiency of package, warm climate:	261	203	%

Model(s):	NIBE S1155-12 W/W + VPB S300		
Type of heat source/sink:	Water-to-water		
Low-temperature heat pump:	No		
Equipped with supplementary heater:	Yes		
Heat pump combination heater:	Yes		
Climate condition:	Average		
Temperature application:	Medium temperature (55 °C)		



Climate condition:				Average			
Temperature application:		Medium temperature (55 °C)		emperature (55 °C)			
Applied standards: EN14825 and EN1614	7						
Rated heat output	Prated	14,0	kW	Seasonal space heating ener efficiency	rgy η _s	197	%
Declared capacity for part load at outdoor tem	perature Ti			Declared coefficient of performanc	ce for part load at outdo	or temperatu	re Ti
Tj = -7 °C	Pdh	12,4	kW	Tj = -7 °C	COPd	3,84	kW
Tj = +2 °C	Pdh	7,6	kW	Tj = +2 °C	COPd	5,11	kW
Tj = +7 °C	Pdh	4,9	kW	Tj = +7 °C	COPd	5,89	kW
Tj = +12 °C	Pdh	3,2	kW	Tj = +12 °C	COPd	6,36	kW
Tj = biv	Pdh	13,9	kW	Tj = biv	COPd	3,48	kW
Tj = TOL	Pdh	13,9	kW	Tj = TOL	COPd	3,48	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW
Bivalent temperature	T _{biv}	-10	°C	Operation limit temperature	e TOL	-10	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency	COPcyc		-
Degradation co-efficient	Cdh	0,98	-	Heating water operating limi	it WTOL	65	°C
Power consumption in modes other than active	e mode			Supplementary heater			
Off mode	P _{OFF}	0,005	kW	Rated heat output	Psup	0,1	kW
Thermostat-off mode	P _{TO}	0,025	kW				
Standby mode	P _{SB}	0,007	kW	Type of energy input		Electric	
Crankcase heater mode	P _{CK}	0	kW				
Other items							
Capacity control	variable			Rated air flow rate, outdoors	s		m³/h
Sound power level, indoors/outdoors	L _{WA}	44/-	dB				
				Rated brine or water flow ra	te,		
Annual energy consumption	Q_{HE}	5657	kWh	outdoor heat exchanger		1,98	m³/h
For heat pump combination heater:							
Declared load profile		XXL		Water heating energy efficie	ency η _{wh}	117	%
Daily electricity consumption	Q _{elec}	8,36	kWh	Daily fuel consumption	Q _{fuel}		kWh
Annual electricity consumption	AEC	1837	kWh	Annual fuel consumption	AFC		GJ
Approved by:							
Contact details	© NIRF F	nergy Systa	ems - Roy	(14 - Hannabadsvägen 5 - 2852	21 Markaryd - Swed	len	
	J MIDE LI				a ya 34VCC		