




♦NIBE

NIBE S1155-16 W/W + VPB S300

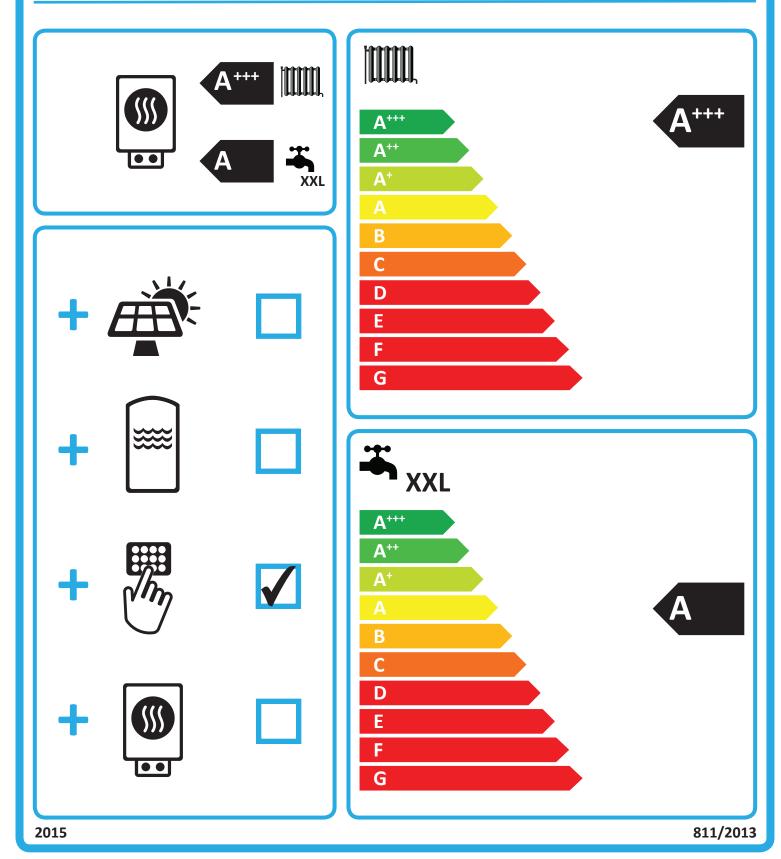

Product fiche

Supplier's name:	NI		
Model:	NIBE S1155-16		
Temperature application	35	55	°C
Declared load profile for water heating	X		
Seasonal space heating energy efficiency class, average climate:	A+++	A+++	
Water heating energy efficiency class, average climate:			
Rated heat output, average climate:	19	19	kW
Annual energy consumption for space heating, average climate	6070	7834	kWh
Annual electricity consumption for water heating, average climate	1781		kWh
Seasonal space heating energy efficiency, average climate:	251	192	%
Water heating energy efficiency, average climate:	12	%	
Sound power level LWA indoors	42	42	dB
Rated heat output, cold climate:	19	19	kW
Rated heat output, warm climate:	19	19	kW
Annual energy consumption for space heating, cold climate	6861	8907	kWh
Annual electricity consumption for water heating, cold climate	1781		kWh
Annual energy consumption for space heating, warm climate	3980	5140	kWh
Annual electricity consumption for water heating, warm climate	1781		kWh
Seasonal space heating energy efficiency, cold climate:	265	202	%
Water heating energy efficiency, cold climate:	121		%
Seasonal space heating energy efficiency, warm climate:	247	190	%
Water heating energy efficiency, warm climate:	121		%
Sound power level LWA outdoors	-	-	dB

Data for package fiche

Controller class	١		
Controler contribution to efficiency	4		%
Seasonal space heating energy efficiency of package, average climate:	255	196	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	269	206	%
Seasonal space heating energy efficiency of package, warm climate:	251	194	%

Model(s):		NIBE S1155-16 W/W + VPB S300		-16 W/W + VPB S300			
Type of heat source/sink:		Wat		ter-to-water			
Low-temperature heat pump:		No		No			
Equipped with supplementary heater:				Yes	�ℕ		К. н.
Heat pump combination heater:			Yes				
Climate condition:				Average			
Temperature application:		Medium temperature (55 °C)					
Applied standards: EN14825 and EN1614	7						
				Seasonal space heating ene	ergy		
Rated heat output	Prated	19,0	kW	efficiency	ŋ	ls 192	%
Declared capacity for part load at outdoor tem	perature Tj			Declared coefficient of performan	nce for part load at	outdoor tempera	iture Ti
Tj = -7 °C	Pdh	16,9	kW	Tj = -7 °C		Pd 3,82	kW
Tj = +2 °C	Pdh	10,3	kW	Tj = +2 °C	CO	Pd 5,08	kW
Tj = +7 °C	Pdh	7,0	kW	Tj = +7 °C	СО)Pd 5,92	kW
Tj = +12 °C	Pdh	7,1	kW	Tj = +12 °C	СО	Pd 6,01	kW
Tj = biv	Pdh	18,9	kW	Tj = biv	CO	Pd 3,51	kW
Tj = TOL	Pdh	18,9	kW	Tj = TOL	CO)Pd 3,51	kW
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	CO	Pd	kW
Bivalent temperature	T _{biv}	-10	°C	Operation limit temperatur	e T(DL -10	°C
Cycling interval capacity for heating	Pcych	10	kW	Cycling interval efficiency	-	Pcyc	-
Degradation co-efficient	Cdh	0,98	-	Heating water operating lim		TOL 65	°C
		-,	· ·				
Power consumption in modes other than active	1			Supplementary heater			
Off mode	P _{OFF}	0,002	kW	Rated heat output	Ps	up 0,1	kW
Thermostat-off mode	P _{TO}	0,035	kW				
Standby mode	P _{SB}	0,007	kW	Type of energy input		Electric	
Crankcase heater mode	Р _{СК}	0,03	kW				
Other items							
Capacity control		variable		Rated air flow rate, outdoor	rs		m³/h
Sound power level, indoors/outdoors	Lwa	42/-	dB				
	-wa	/	45	Rated brine or water flow ra	ate.		_
Annual energy consumption	Q _{HE}	7834	kWh	outdoor heat exchanger	·/	2,81	m³/h
For heat pump combination heater:		100				101	
Declared load profile		XXL		Water heating energy effici	iency η,	wh 121	%
Daily electricity consumption	Q _{elec}	8,11	kWh	Daily fuel consumption	Q	fuel	kWh
Annual electricity consumption	AEC	1781	kWh	Annual fuel consumption		FC	GJ
					l	l	
Approved by:	o						
Contact details	© NIBE E	nergy Syste	ems - Bo	14 - Hannabadsvägen 5 - 285	21 Markaryd -	Sweden	