



ENERGY



NIBE S1155-6



55 °C

35 °C



A⁺⁺⁺

A⁺⁺⁺



42 dB



dB

6
6
6
kW

6
6
6
kW



2019



811/2013




ENERGY



NIBE S1155-6 + VPB S300

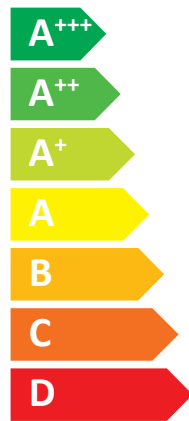

A⁺⁺⁺

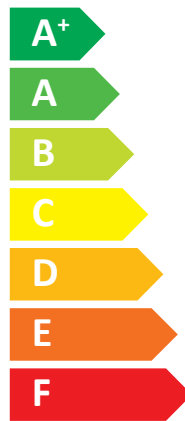

A



42 dB



dB



■ 6 kW
■ 6 kW
■ 6 kW



ENERGY

NIBE


NIBE S1155-6 + VPB S300



A⁺⁺⁺



A



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺⁺⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G


A

Product fiche

| | | | |
|---|---------------------------|------|-----|
| Supplier's name: | NIBE | | |
| Model: | NIBE S1155-6 (+ VPB S300) | | |
| Temperature application | 35 | 55 | °C |
| Declared load profile for water heating | XL | | |
| Seasonal space heating energy efficiency class, average climate: | A+++ | A+++ | |
| Water heating energy efficiency class, average climate: | A | | |
| Rated heat output, average climate: | 5,5 | 5,5 | kW |
| Annual energy consumption for space heating, average climate | 2188 | 2875 | kWh |
| Annual electricity consumption for water heating, average climate | 1697 | | kWh |
| Seasonal space heating energy efficiency, average climate: | 200 | 150 | % |
| Water heating energy efficiency, average climate: | 99 | | % |
| Sound power level LWA indoors | 42 | 42 | dB |
| Rated heat output, cold climate: | 5,5 | 5,5 | kW |
| Rated heat output, warm climate: | 5,5 | 5,5 | kW |
| Annual energy consumption for space heating, cold climate | 2481 | 3287 | kWh |
| Annual electricity consumption for water heating, cold climate | 1697 | | kWh |
| Annual energy consumption for space heating, warm climate | 1408 | 1852 | kWh |
| Annual electricity consumption for water heating, warm climate | 1697 | | kWh |
| Seasonal space heating energy efficiency, cold climate: | 211 | 157 | % |
| Water heating energy efficiency, cold climate: | 99 | | % |
| Seasonal space heating energy efficiency, warm climate: | 201 | 151 | % |
| Water heating energy efficiency, warm climate: | 99 | | % |
| Sound power level LWA outdoors | - | - | dB |

Data for package fiche

| | | | |
|--|------|------|---|
| Controller class | VI | | |
| Controller contribution to efficiency | 4 | | % |
| Seasonal space heating energy efficiency of package, average climate: | 204 | 154 | % |
| Seasonal space heating energy efficiency class for package, average climate: | A+++ | A+++ | % |
| Seasonal space heating energy efficiency of package, cold climate: | 215 | 161 | % |
| Seasonal space heating energy efficiency of package, warm climate: | 205 | 155 | % |

| | | | | | | | | | |
|---|-------------------|---|-----|--|---|---|------|-----|------|
| Model(s): | | NIBE S1155-6 (+ VPB S300) | | | |  | | | |
| Type of heat source/sink: | | Brine-to-water | | | | | | | |
| Low-temperature heat pump: | | No | | | | | | | |
| Equipped with supplementary heater: | | Yes | | | | | | | |
| Heat pump combination heater: | | Yes | | | | | | | |
| Climate condition: | | Average | | | | | | | |
| Temperature application: | | Medium temperature (55 °C) | | | | | | | |
| Applied standards: EN14825 and EN16147 | | | | | | | | | |
| Rated heat output | | Prated | 5,5 | kW | Seasonal space heating energy efficiency | | ηs | 150 | % |
| Declared capacity for part load at outdoor temperature Tj | | | | | Declared coefficient of performance for part load at outdoor temperature Tj | | | | |
| Tj = -7 °C | Pdh | 5,0 | kW | Tj = -7 °C | COPd | 3,06 | - | | |
| Tj = +2 °C | Pdh | 3,0 | kW | Tj = +2 °C | COPd | 3,97 | - | | |
| Tj = +7 °C | Pdh | 2,0 | kW | Tj = +7 °C | COPd | 4,63 | - | | |
| Tj = +12 °C | Pdh | 1,2 | kW | Tj = +12 °C | COPd | 4,86 | - | | |
| Tj = biv | Pdh | 5,4 | kW | Tj = biv | COPd | 2,84 | - | | |
| Tj = TOL | Pdh | 5,4 | kW | Tj = TOL | COPd | 2,84 | - | | |
| Tj = -15 °C (if TOL < -20 °C) | Pdh | | kW | Tj = -15 °C (if TOL < -20 °C) | COPd | | - | | |
| | | | | | | | | | |
| Bivalent temperature | Tbiv | -10 | °C | Operation limit temperature | | TOL | -10 | °C | |
| Cycling interval capacity for heating | Pcych | | kW | Cycling interval efficiency | | COPcyc | | - | |
| Degradation co-efficient | Cdh | 0,99 | - | Heating water operating limit | | WTOL | 65 | °C | |
| Power consumption in modes other than active mode | | | | | Supplementary heater | | | | |
| Off mode | P _{OFF} | 0,002 | kW | Rated heat output | | Psup | 0,1 | kW | |
| Thermostat-off mode | P _{TO} | 0,007 | kW | | | | | | |
| Standby mode | P _{SB} | 0,007 | kW | Type of energy input | | Electric | | | |
| Crankcase heater mode | P _{CK} | 0,009 | kW | | | | | | |
| Other items | | | | | | | | | |
| Capacity control | variable | | | Rated air flow rate, outdoors | | | | | m³/h |
| Sound power level, indoors/outdoors | L _{WA} | 42/- | dB | | | | | | |
| Annual energy consumption | Q _{HE} | 2875 | kWh | Rated brine or water flow rate, outdoor heat exchanger | | | 0,68 | | m³/h |
| For heat pump combination heater: | | | | | | | | | |
| Declared load profile | | XL | | Water heating energy efficiency | | η _{wh} | 99 | % | |
| | | | | | | | | | |
| Daily electricity consumption | Q _{elec} | 7,73 | kWh | Daily fuel consumption | | Q _{fuel} | | kWh | |
| Annual electricity consumption | AEC | 1697 | kWh | Annual fuel consumption | | AFC | | GJ | |
| Approved by: | | | | | | | | | |
| Contact details | | © NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden | | | | | | | |