




◇NIBE

NIBE S1255-16 W/W

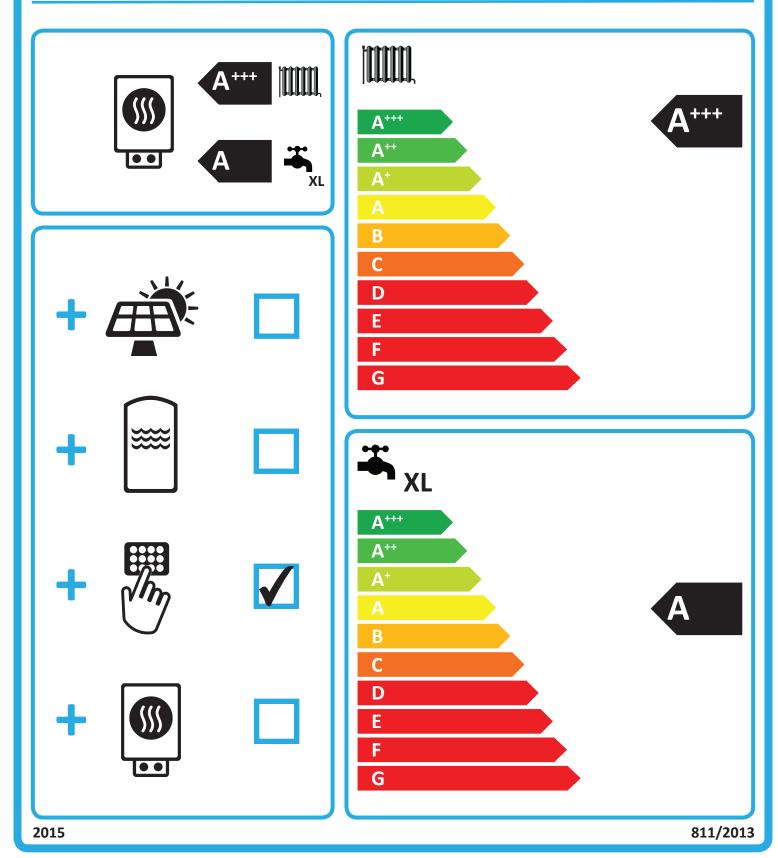

Product fiche

| Supplier's name: | NI | | |
|--|----------|------|-----|
| Model: | NIBE S12 | | |
| Temperature application | 35 | 55 | °C |
| Declared load profile for water heating | х | | |
| Seasonal space heating energy efficiency class, average climate: | A+++ | A+++ | |
| Water heating energy efficiency class, average climate: | | | |
| Rated heat output, average climate: | 19 | 19 | kW |
| Annual energy consumption for space heating, average climate | 6070 | 7834 | kWh |
| Annual electricity consumption for water heating, average climate | 14 | kWh | |
| Seasonal space heating energy efficiency, average climate: | 251 | 192 | % |
| Water heating energy efficiency, average climate: | 1 | % | |
| Sound power level LWA indoors | 42 | 42 | dB |
| Rated heat output, cold climate: | 19 | 19 | kW |
| Rated heat output, warm climate: | 19 | 19 | kW |
| Annual energy consumption for space heating, cold climate | 6861 | 8907 | kWh |
| Annual electricity consumption for water heating, cold climate | 1486 | | kWh |
| Annual energy consumption for space heating, warm climate | 3980 | 5140 | kWh |
| Annual electricity consumption for water heating, warm climate | 1486 | | kWh |
| Seasonal space heating energy efficiency, cold climate: | 265 | 202 | % |
| Water heating energy efficiency, cold climate: | 1 | % | |
| Seasonal space heating energy efficiency, warm climate: | 247 | 190 | % |
| Water heating energy efficiency, warm climate: | 1. | % | |
| Sound power level LWA outdoors | - | - | dB |

Data for package fiche

| Controller class | ١ | | |
|--|------|------|---|
| Controler contribution to efficiency | | % | |
| Seasonal space heating energy efficiency of package, average climate: | 255 | 196 | % |
| Seasonal space heating energy efficiency class for package, average climate: | A+++ | A+++ | % |
| Seasonal space heating energy efficiency of package, cold climate: | 269 | 206 | % |
| Seasonal space heating energy efficiency of package, warm climate: | 251 | 194 | % |

| Model(s): | | NIBE \$1255-16 W/W | | | | | |
|--|-------------------|--------------------|--------------------|------------------------------------|------------------------------|---------------|-------|
| Type of heat source/sink: | | Wat | | er-to-water | | | |
| Low-temperature heat pump: | | No | | No | | | |
| Equipped with supplementary heater: | | | | Yes | �NI | | HC. |
| Heat pump combination heater: | | Yes | | Yes | | | |
| Climate condition: | | | | Average | | | |
| emperature application: Medium | | Medium te | emperature (55 °C) | | | | |
| Applied standards: EN14825 and EN1614 | 7 | | | | | | |
| | | | | Seasonal space heating energy | rgy | | |
| Rated heat output | Prated | 19,0 | kW | efficiency | η _s | 192 | % |
| Declared capacity for part load at outdoor tem | perature Ti | | | Declared coefficient of performant | ce for part load at outd | oor temperatu | re Ti |
| Tj = -7 °C | Pdh | 16,9 | kW | Tj = -7 °C | COPd | 3,82 | kW |
| Ti = +2 °C | Pdh | 10,3 | kW | Tj = +2 °C | COPd | 5,08 | kW |
| Tj = +7 °C | Pdh | 7,0 | kW | Tj = +7 °C | COPd | 5,92 | kW |
| Tj = +12 °C | Pdh | 7,1 | kW | Tj = +12 °C | COPd | 6,01 | kW |
| Tj = biv | Pdh | 18,9 | kW | Tj = biv | COPd | 3,51 | kW |
| Tj = TOL | Pdh | 18,9 | kW | Tj = TOL | COPd | 3,51 | kW |
| Tj = -15 °C (if TOL < -20 °C) | Pdh | | kW | Tj = -15 °C (if TOL < -20 °C) | COPd | | kW |
| Bivalent temperature | T _{biv} | -10 | °C | Operation limit temperature | e TOL | -10 | °C |
| Cycling interval capacity for heating | Pcych | 10 | kW | Cycling interval efficiency | СОРсус | 10 | - |
| Degradation co-efficient | Cdh | 0.98 | - | Heating water operating lim | | 65 | °C |
| | | -, | | | - | | _ |
| Power consumption in modes other than active | 1 | | | Supplementary heater | | 1 | 1 |
| Off mode | P _{OFF} | 0,002 | kW | Rated heat output | Psup | 0,1 | kW |
| Thermostat-off mode | P _{TO} | 0,035 | kW | | | | |
| Standby mode | P _{SB} | 0,007 | kW | Type of energy input | | Electric | |
| Crankcase heater mode | Р _{ск} | 0,03 | kW | | | | |
| Other items | | | | | | | |
| Capacity control | | variable | | Rated air flow rate, outdoor | S | | m³/h |
| Sound power level, indoors/outdoors | L _{WA} | 42/- | dB | | | | |
| | -WA | -+2/- | ub | Rated brine or water flow ra | ite. | + | + |
| Annual energy consumption | Q _{HE} | 7834 | kWh | outdoor heat exchanger | , | 2,81 | m³/h |
| | 1 | | <u> </u> | <u>.</u> | | | |
| For heat pump combination heater: | | | I | | | | 1 |
| Declared load profile | | XL | | Water heating energy efficie | e ncy η _{wh} | 113 | % |
| Daily electricity consumption | Q _{elec} | 6,77 | kWh | Daily fuel consumption | Q _{fuel} | | kWh |
| Annual electricity consumption | AEC | 1486 | kWh | Annual fuel consumption | AFC | | GJ |
| | | 2.00 | | | | 1 | |
| Approved by: | | | | | | | |
| Contact details | © NIBE E | nergy Syste | ems - Box | 14 - Hannabadsvägen 5 - 2852 | 21 Markaryd - Swe | eden | |