

A-bewerteter Schalleistungspegel gemäß EN 12102

dB(A) re. 1pW

		Min. ¹	Nominal ²	Hoch ³	Max. ⁴
Produkt	L _{w(A)}	40,0	44,0	48,0	53,0
Abluftkanal	L _{w(A)}	27,0	34,0	42,0	51,0
Fortluftkanal	L _{w(A)}	34,0	45,0	52,0	67,0

- 1 28 l/s (100 m³/h) bei 100 Pa, Verdichterleistung 1,5 kW
- 2 56 l/s (200 m³/h) bei 175 Pa, Verdichterleistung 3,5 kW
- 3 83 l/s (300 m³/h) bei 250 Pa, Verdichterleistung 5,5 kW
- 4 111 l/s (400 m³/h) bei 250 Pa, Verdichterleistung 7,0 kW

Schalleistungspegel gemäß EN 12102


dB re. 1pW

		Min. ¹	Nominal ²	Hoch ³	Max. ⁴
Produkt	L _w	51,0	54,0	56,0	62,0
Abluftkanal	L _w	35,0	43,0	50,0	58,0
Fortluftkanal	L _w	45,0	54,0	62,0	80,0

Ventilator und Verdichter


Schalleistungspegel

(dB(A) re 1pW)

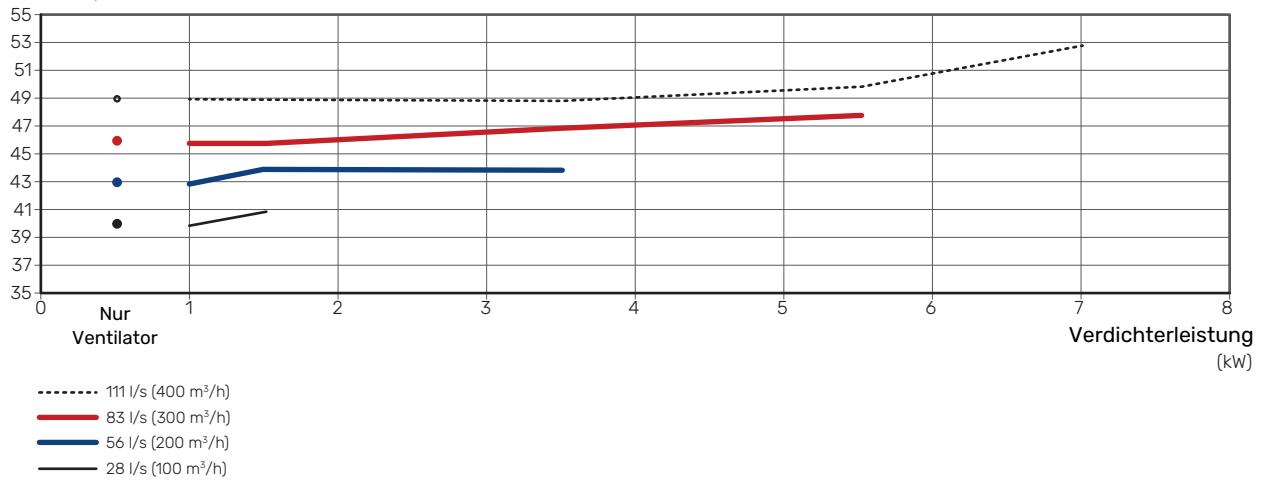


S735

Schalleistungspegel (dB(A) re. 1pW)

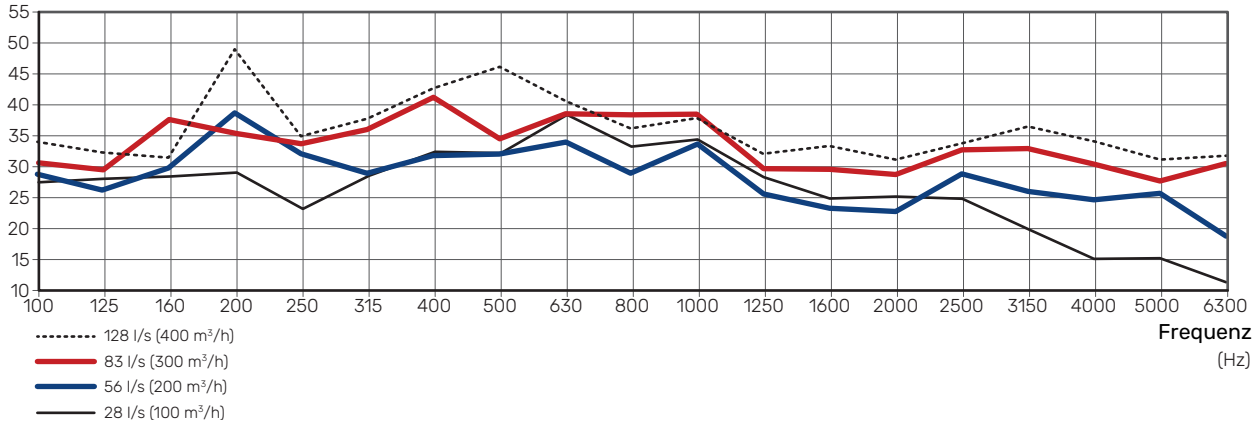

Abluftkanal

Schalleistungspegel (dB(A) re. 1pW)

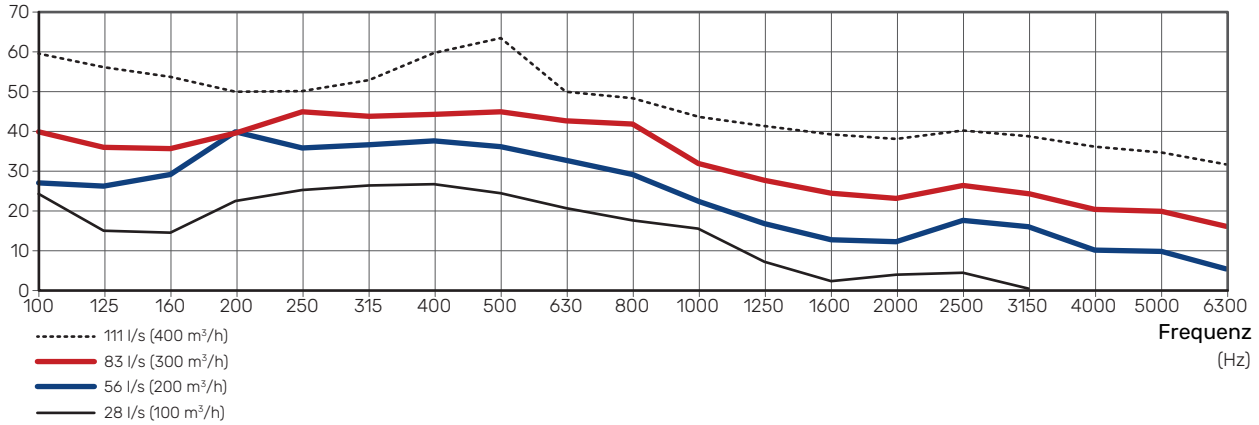

Fortluftkanal

Schalleistungspegel (dB(A) re. 1pW)

