

A-bewerteter Schalleistungspegel gemäß EN 12102

dB(A) re. 1pW

		Min. ¹	Nominal ²	Hoch ³	Max. ⁴
Produkt	L _{w(A)}	38,0	40,0	43,0	48,0
Abluftkanal	L _{w(A)}	28,0	34,0	42,0	44,0
Fortluftkanal	L _{w(A)}	35,0	45,0	52,0	56,0

- ¹ 17 l/s (60 m³/h) bei 60 Pa, Verdichterleistung 0,9 kW
- ² 28 l/s (100 m³/h) bei 100 Pa, Verdichterleistung 1,5 kW
- ³ 56 l/s (200 m³/h) bei 175 Pa, Verdichterleistung 3,5 kW
- ⁴ 69 l/s (250 m³/h) bei 200 Pa, Verdichterleistung 5,0 kW

Schalleistungspegel gemäß EN 12102


dB re. 1pW

		Min. ¹	Nominal ²	Hoch ³	Max. ⁴
Produkt	L _w	51,0	53,0	57,0	60,0
Abluftkanal	L _w	41,0	43,0	50,0	54,0
Fortluftkanal	L _w	45,0	54,0	62,0	66,0

Ventilator und Verdichter

Schalleistungspegel


(dB(A) re 1pW)

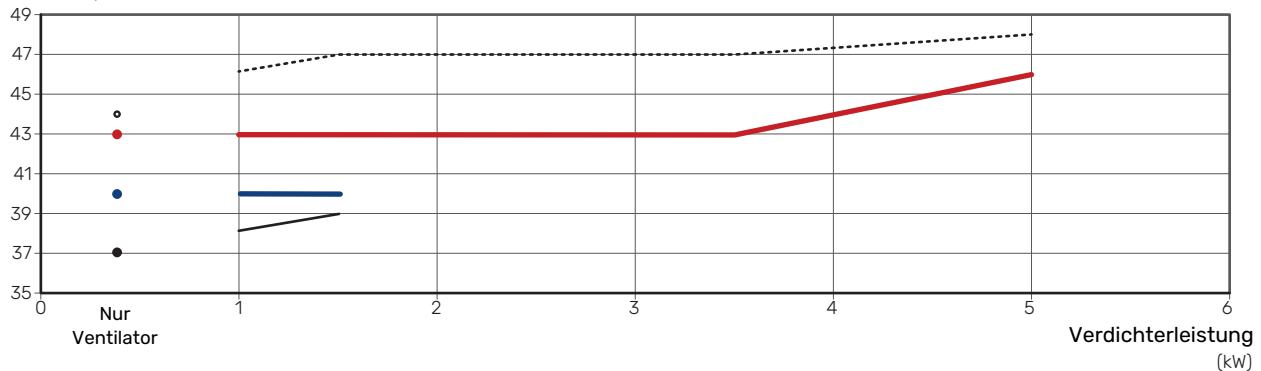

- 69 l/s (250 m³/h)
- 56 l/s (200 m³/h)
- 28 l/s (100 m³/h)
- 17 l/s (60 m³/h)


S735-4

Schalleistungspegel
(dB(A) re. 1pW)

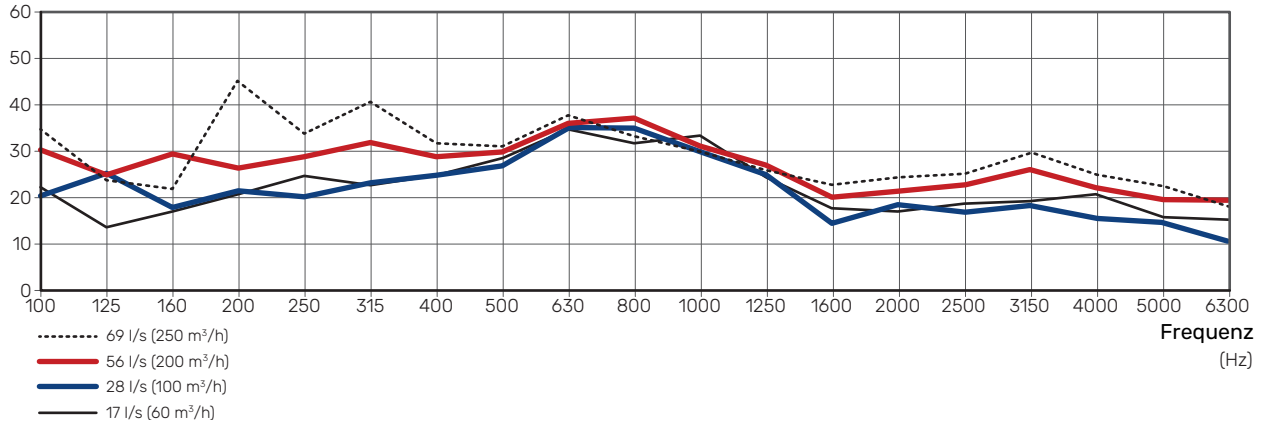

Abluftkanal

Schalleistungspegel
(dB(A) re. 1pW)

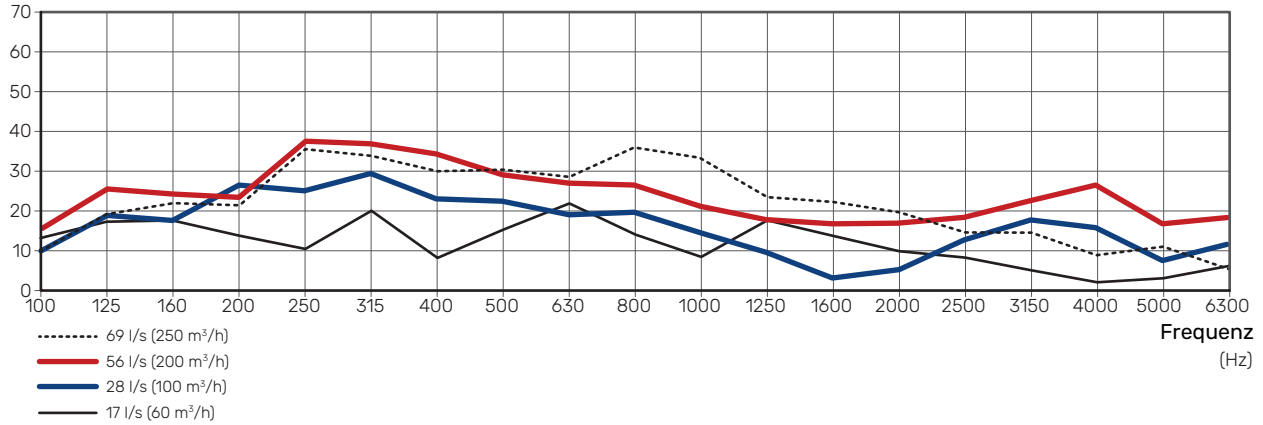

Fortluftkanal

Schalleistungspegel
(dB(A) re. 1pW)

