






## ENERG Y UA EHEPΓИЯ · ενεργεια IE IA

NIBE

NIBE S735-7 E

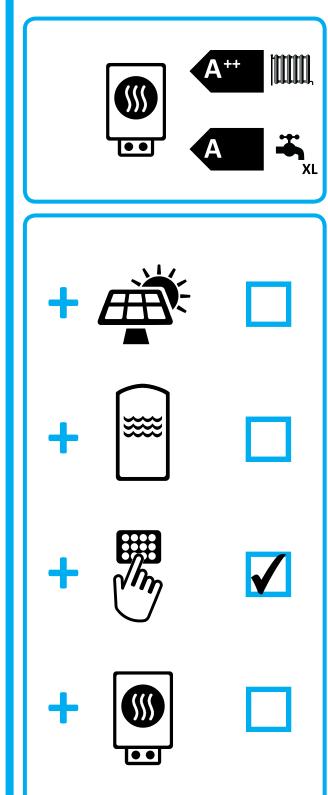

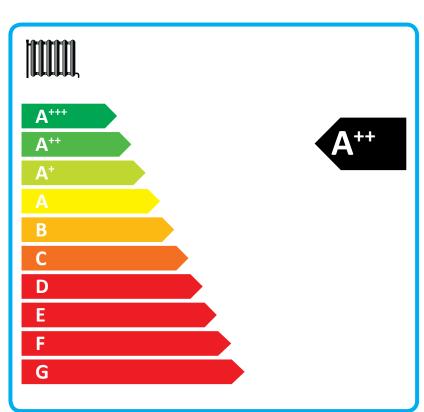

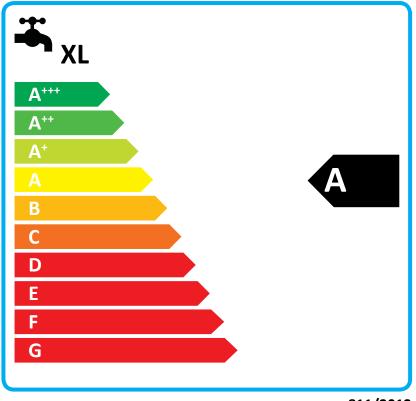

Supplier's name:	NIBE		
Model:	NIBE S735-7 E		
Temperature application	35	55	°C
Declared load profile for water	ΥI		
heating	XL		
Seasonal space heating energy	<b>.</b>	۸	
efficiency class, average climate:	A+++	A++	
Water heating energy efficiency	Α		
class, average climate:	A		
Rated heat output, average climate:	6	6	kW
Annual energy consumption for	0574	0.450	1.30/1
space heating, average climate	2571	3156	kWh
Annual electricity consumption for	143	2	1-10/1-
water heating, average climate	143	2	kWh
Seasonal space heating energy	177	144	%
efficiency, average climate:	177	144	%
Water heating energy efficiency,	11-	7	%
average climate:	117		%
Sound power level LWA indoors	44		dB
Rated heat output, cold climate:	6	6	kW
Rated heat output, warm climate:	6	6	kW
Annual energy consumption for	2905	3622	kWh
space heating, cold climate	2903	3022	KVVII
Annual electricity consumption for	1432		kWh
water heating, cold climate	1432		KVVII
Annual energy consumption for	1695	2070	kWh
space heating, warm climate	1093	2010	KVVII
Annual electricity consumption for	1432		kWh
water heating, warm climate			KVVII
Seasonal space heating energy	187	149	%
efficiency, cold climate:	101	170	/0
Water heating energy efficiency,	117		%
cold climate:	117		/0
Seasonal space heating energy	174	142	%
efficiency, warm climate:	117	174	/0
Water heating energy efficiency,	117		%
warm climate:			
Sound power level LWA outdoors	-		dB

## Data for package fiche

Controller class	VI		
Controler contribution to efficiency	4		%
Seasonal space heating energy efficiency of package, average climate:	181	148	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	191	153	%
Seasonal space heating energy efficiency of package, warm climate:	178	146	%

Model(s):	NIBE S735-7 E	
Type of heat source/sink:	Exhaust air/water	
Low-temperature heat pump:	No	
Equipped with supplementary heater:	Yes	
Heat pump combination heater:	Yes	
Climate condition:	Average	
Temperature application:	Medium temperature (55 °C)	
Applied standards: EN14825 - EN16147 - EN12102	-1	
	Seasonal space heating	



Climate condition:				Average			
Temperature application:			Medium <sup>-</sup>	temperature (55 °C)			
Applied standards: EN14825 - EN16147	- EN12102-	·1					
Dated heat autout	Dratad	5,6	kW	Seasonal space heating energy efficiency	n	144	%
Rated heat output	Prated	3,0	KVV	efficiency	$\eta_{s}$	144	70
Declared capacity for part load at outdoor tem	perature Tj			Declared coefficient of performance for par	t load at outdo	or temperatur	е Тј
Tj = -7 °C	Pdh	4,9	kW	Tj = -7 °C	COPd	2,52	
Tj = +2 °C	Pdh	3,0	kW	Tj = +2 °C	Tj = +2 °C COPd 3,77		
Tj = +7 °C	Pdh	2,0	kW	Tj = +7 °C	COPd	4,53	
Tj = +12 °C	Pdh	1,5	kW	Tj = +12 °C	COPd	5,20	
Tj = biv	Pdh	5,5	kW	Tj = biv	COPd	2,33	
Tj = TOL	Pdh	5,5	kW	Tj = TOL	COPd	2,33	
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-10	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficiency	COPcyc		-
Degradation co-efficient	Cdh	0,87	-	Heating water operating limit	WTOL	65	°C
Power consumption in modes other than active		0.000	1347	Supplementary heater		0.0	1347
Off mode	P <sub>OFF</sub>	0,008	kW	Rated heat output	Psup	0,0	kW
Thermostat-off mode	P <sub>TO</sub>	0,038	kW				
Standby mode	P <sub>SB</sub>	0,034	kW	Type of energy input Electric			
Crankcase heater mode	P <sub>CK</sub>	0,008	kW				
Other items							
Capacity control				Rated air flow rate, outdoors		239,00	m³/h
				Rated water flow rate, indoor heat			
Sound power level, indoors/outdoors	$L_{WA}$	44/-	dB	exchanger		0,47	m³/h
				Rated brine or water flow rate,			2.0
Annual energy consumption	$Q_{HE}$	3156	kWh	outdoor heat exchanger			m³/h
For heat pump combination heater:	ı						
Declared load profile		XL		Water heating energy efficiency	$\eta_{wh}$	117	%
Daily electricity consumption	Q <sub>elec</sub>	6,90	kWh	Daily fuel consumption	$Q_{fuel}$		kWh
Annual electricity consumption	AEC	1432	kWh	Annual fuel consumption	AFC		GJ
Approved by:							
Contact details	© NIBF F	nergy Syste	ems - Bo	x 14 - Hannabadsvägen 5 - 28521 Mark	arvd - Swe	den	
	O MOL LI						