






IJA ENERG ΙE енергия · ενεργεια




NIBE F1145-6 + VPB300

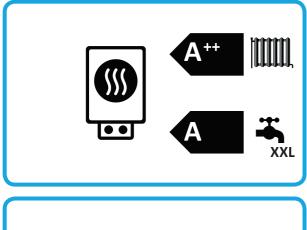

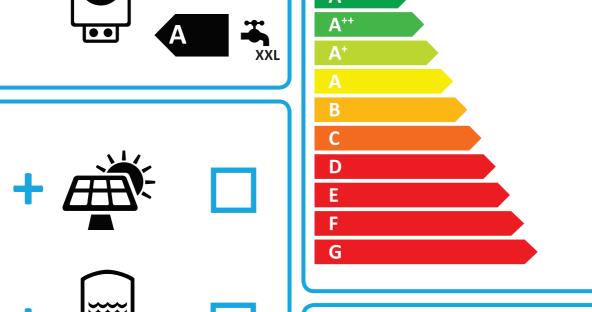

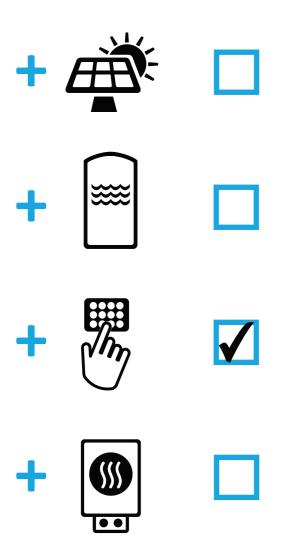

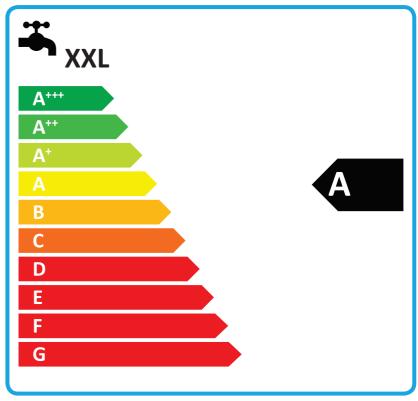

Supplier's name:	NIBE		
Model:	NIBE F1145-6 (+VPB 300)		
Temperature application	35	55	°C
Declared load profile for water heating	XXL		
Seasonal space heating energy efficiency class, average climate:	A+++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	7	7	kW
Annual energy consumption for space heating, average climate	3151	3640	kWh
Annual electricity consumption for water heating, average climate	2025		kWh
Seasonal space heating energy efficiency, average climate:	178	140	%
Water heating energy efficiency, average climate:	106		%
Sound power level LWA indoors	42		dB
Rated heat output, cold climate:	7	7	kW
Rated heat output, warm climate:	7	7	kW
Annual energy consumption for space heating, cold climate	3577	4201	kWh
Annual electricity consumption for water heating, cold climate	2025		kWh
Annual energy consumption for space heating, warm climate	2080	2447	kWh
Annual electricity consumption for water heating, warm climate	2025		kWh
Seasonal space heating energy efficiency, cold climate:	185	145	%
Water heating energy efficiency, cold climate:	106		%
Seasonal space heating energy efficiency, warm climate:	177	138	%
Water heating energy efficiency, warm climate:	106		%
Sound power level LWA outdoors		-	dB

Data for package fiche

Controller class	VII		
Controler contribution to efficiency	3,5		%
Seasonal space heating energy efficiency of package, average climate:	182	143	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	188	148	%
Seasonal space heating energy efficiency of package, warm climate:	181	142	%

Model(s):	NIBE F1145-6 + VPB300		
Type of heat source/sink:	Brine-to-water		
Low-temperature heat pump:	No		
Equipped with supplementary heater:	Yes		
Heat pump combination heater:	Yes		
Climate condition:	Average		
Temperature application:	Medium temperature (55 °C)		
Applied standards: EN1/1825 EN161/17 and EN12102			



Contact details © NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							
Approved by:							
Annual electricity consumption	AEC	2023	KVVII	Ailliuai luei collsumptioi	II AFC		GJ
Annual electricity consumption	Q _{elec} AEC	2025	kWh	Annual fuel consumption	Q _{fuel}		GJ
Daily electricity consumption	Ιο. Ι	9,22	kWh	Daily fuel consumption	0		kWh
Declared load profile		XXL		Water heating energy ef	fficiency η_{wh}	106	%
For heat pump combination heater:			_				
Annual energy consumption	Q_{HE}	3640	kWh	outdoor heat exchanger		0,99	m³/h
				Rated brine or water flo	,		
Sound power level, indoors/outdoors	L _{WA}	42/-	dB	exchanger		0,56	m³/h
Capacity control		iixeu		Rated air flow rate, outd			
Other items Capacity control fixed		Rated air flow rate, outd	loors		m³/h		
Crankcase heater mode	P _{CK}	0,014	kW				
Standby mode	P_{SB}	0,007	kW	Type of energy input	Electric		
Thermostat-off mode	P _{TO}	0	kW				
Off mode	P _{OFF}	0,002	kW	Rated heat output	Psup	1,3	kW
Power consumption in modes other than active				Supplementary heater			T
Degradation co-efficient	Cdh	1,00	-	Heating water operating	g limit WTOL	65	°C
Cycling interval capacity for heating	Pcych		kW	Cycling interval efficience			-
Bivalent temperature	T _{biv}	-5	°C	Operation limit tempera		-10	°C
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °	C) COPd		kW
Tj = TOL	Pdh	5,2	kW	Tj = TOL	COPd	2,93	kW
Tj = biv	Pdh	5,4	kW	Tj = biv	COPd	3,32	kW
Tj = +12 °C	Pdh	5,8	kW	Tj = +12 °C	COPd	4,53	kW
Γj = +7 °C	Pdh	5,6	kW	Tj = +7 °C	COPd	4,12	kW
Tj = +2 °C	Pdh	5,5	kW	Tj = +2 °C	COPd	3,75	kW
Tj = -7 °C	Pdh	5,3	kW	Tj = -7 °C	COPd	3,16	kW
Declared capacity for part load at outdoor tem	noraturo Ti	·		Declared coefficient of perfor	mance for part load at outdo	or tomporate	ıro Ti
Rated heat output	Prated	6,50	kW	efficiency	energy η_s	140	%
Applied standards: EN14825, EN16147 ar	10 EN 12 102			Seasonal space heating	010101		
Applied standards: EN14825, EN16147 ar	-d EN40400		iviculuiii	temperature (55°C)			
Temperature application:		Average Medium temperature (55 °C		•			
Climate condition:				Average			