




 ENERG
 Y
 ЈА

 енергия · ενεργεια
 ΙΕ
 ΙΑ

NIBE

NIBE F1345-24

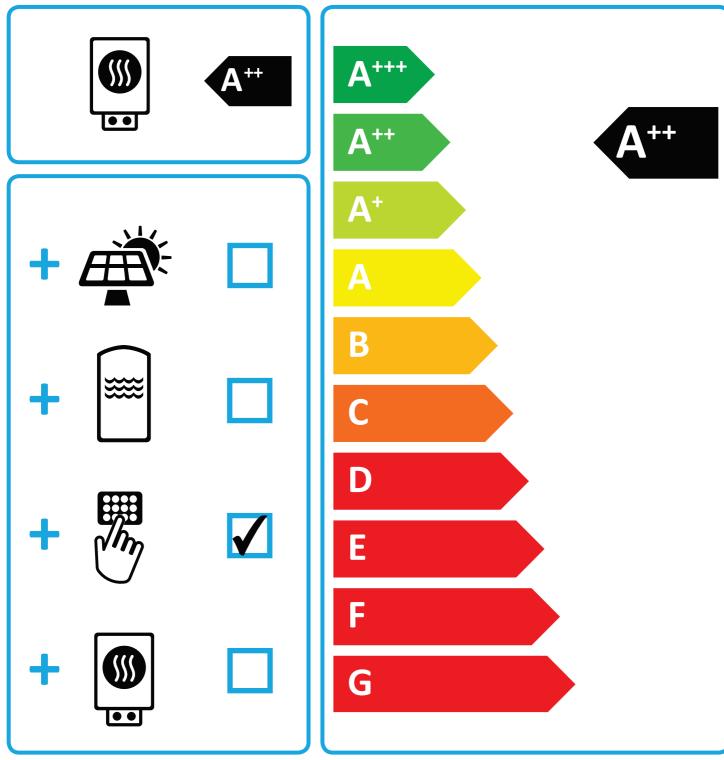

| Supplier's name: | NI | | | |
|---|--------|---------|-----------|--|
| Model: | NIBE F | 1345-24 | | |
| Temperature application | 35 | 55 | °C | |
| Declared load profile for water | | | | |
| heating | | | | |
| Seasonal space heating energy | A+++ | A++ | | |
| efficiency class, average climate: | | АТТ | | |
| Water heating energy efficiency | | | | |
| class, average climate: | | | | |
| Rated heat output, average climate: | 28 | 28 | kW | |
| Annual energy consumption for | 11996 | 15287 | kWh | |
| space heating, average climate | 11000 | 15207 | | |
| Annual electricity consumption for | | | kWh | |
| water heating, average climate | | | K V V I I | |
| Seasonal space heating energy | 185 | 143 | % | |
| efficiency, average climate: | 100 | 145 | 70 | |
| Water heating energy efficiency, | | | % | |
| average climate: | | | | |
| Sound power level LWA indoors | 4 | dB | | |
| Rated heat output, cold climate: | 28 | 28 | kW | |
| Rated heat output, warm climate: | 28 | 28 | kW | |
| Annual energy consumption for | 13730 | 17514 | kWh | |
| space heating, cold climate | 13730 | 17514 | | |
| Annual electricity consumption for | | | kWh | |
| water heating, cold climate | | 1 | | |
| Annual energy consumption for | 7823 | 9904 | kWh | |
| space heating, warm climate | | | | |
| Annual electricity consumption for water heating, warm climate | | | kWh | |
| Seasonal space heating energy | | | | |
| efficiency, cold climate: | 193 | 150 | % | |
| Water heating energy efficiency, cold | | | | |
| climate: | | | % | |
| Seasonal space heating energy | | | | |
| efficiency, warm climate: | 183 | 143 | % | |
| Water heating energy efficiency, | | I | | |
| warm climate: | | | % | |
| Sound power level LWA outdoors | | - | dB | |

Data for package fiche

| Controller class | | | |
|--|------|-----|---|
| Controler contribution to efficiency | 2 | | % |
| Seasonal space heating energy efficiency of package, average climate: | 187 | 145 | % |
| Seasonal space heating energy efficiency class for package, average climate: | A+++ | A++ | % |
| Seasonal space heating energy efficiency of package, cold climate: | 195 | 152 | % |
| Seasonal space heating energy efficiency of package, warm climate: | 185 | 145 | % |

| Model(s): | | NIBE F1345-24 | | | | | | |
|--|---------------------------|--------------------|----------|---------------------------------------|-----------------------|--------------|----------|--|
| Type of heat source/sink: | sink: | | Brir | ne-to-water | | | | |
| Low-temperature heat pump: Equipped with supplementary heater: Heat pump combination heater: Climate condition: | | | | No | | | | |
| | | | | No | NIBE | | | |
| | | | | No | | | | |
| | | | | Average | | | | |
| Temperature application: | | Medium temperature | | emperature (55 °C) | | | | |
| Applied standards: EN14825 | | | | | | | | |
| | | | | Seasonal space heating energy | | | | |
| Rated heat output | Prated | 28,0 | kW | efficiency | η _s | 143 | % | |
| Declared capacity for part load at outdoor tem | nerature Ti | | | Declared coefficient of performance f | or part load at outdo | or temperatu | re Ti | |
| Ti = -7 °C | Pdh | 22,2 | kW | Ti = -7 °C | COPd | 3,27 | - | |
| Ti = +2 °C | Pdh | 22,8 | kW | Tj = +2 °C | COPd | 3,83 | - | |
| Tj = +7 °C | Pdh | 11,7 | kW | Tj = +7 °C | COPd | 4,31 | - | |
| Tj = +12 °C | Pdh | 11,8 | kW | Tj = +12 °C | COPd | 4,58 | - | |
| Tj = biv | Pdh | 22,4 | kW | Tj = biv | COPd | 3,45 | - | |
| Tj = TOL | Pdh | 22,0 | kW | Tj = TOL | COPd | 3,10 | - | |
| Tj = -15 °C (if TOL < -20 °C) | Pdh | | kW | Tj = -15 °C (if TOL < -20 °C) | COPd | | - | |
| Bivalent temperature | т | -4,8 | °C | Operation limit temperature | TOL | -10 | °C | |
| Cycling interval capacity for heating | T _{biv} Pcych | -4,0 | kW | Cycling interval efficiency | COPcyc | -10 | C | |
| Degradation co-efficient | Cdh | 0,99 | KVV | Heating water operating limit | WTOL | 65 | °C | |
| | cun | 0,55 | | | WIGE | 05 | C | |
| Power consumption in modes other than active | e mode | | | Supplementary heater | | | | |
| Off mode | POFF | 0,002 | kW | Rated heat output | Psup | 6,0 | kW | |
| Thermostat-off mode | P _{TO} | 0,03 | kW | | | | | |
| Standby mode | P _{SB} | 0,007 | kW | Type of energy input | | Electric | Electric | |
| Crankcase heater mode | Р _{ск} | 0,07 | kW | | | | | |
| Other items | | | | | | | | |
| Capacity control | | variable | | Rated air flow rate, outdoors | | | m³/h | |
| · · · | | | | Rated water flow rate, indoor h | neat | | | |
| Sound power level, indoors/outdoors | L _{WA} | 47/- | dB | exchanger | | 2,37 | m³/h | |
| | | | | Rated brine or water flow rate, | | | | |
| Annual energy consumption | Q _{HE} | 15287 | kWh | outdoor heat exchanger | | 4,46 | m³/h | |
| For heat pump combination heater: | | | | | | | | |
| Declared load profile | | | Ī | Water heating energy efficiend | y ŋ _{wh} | | % | |
| | I | | | water nearing energy enittent | 'Y 'lwh | | /0 | |
| Daily electricity consumption | Q _{elec} | | kWh | Daily fuel consumption | Q _{fuel} | | kWh | |
| Annual electricity consumption | AEC | | kWh | Annual fuel consumption | AFC | | GJ | |
| Approved by: | | | | | | | | |
| Contact details | | | me . Boy | 14 - Hannabadsvägen 5 - 28521 | Markanyd - Swo | den | | |
| | | icigy Jyste | | 17 Hamasausvagen 5 - 20521 | statkatyu - SWe | ucii | | |