






## ENERG Y UA EHEPΓИЯ · ενεργεια (Ε) (ΙΑ)



NIBE S1156-8 + VPB S300

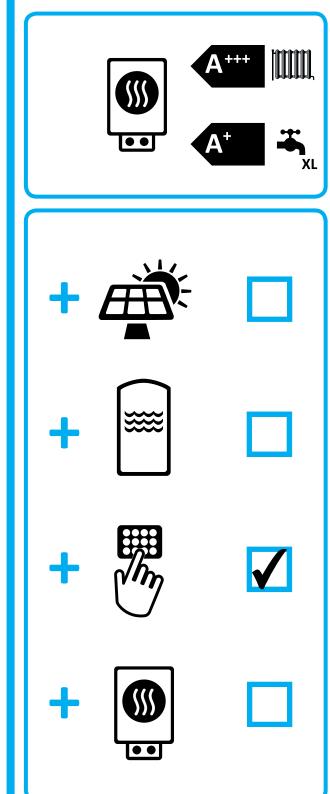

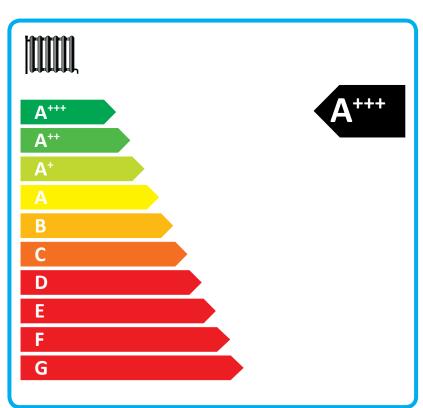

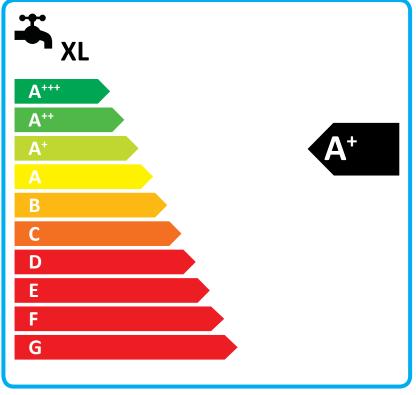

Supplier's name:	NIBE			
Model:	NIBE S1156-8 +	· VPB S300		
Temperature application	35	55	°C	
Declared load profile for water	VI	1		
heating	XL			
Seasonal space heating energy	Λ	Λ		
efficiency class, average climate:	A+++	A+++		
Water heating energy efficiency	A-			
class, average climate:	Α.			
Rated heat output, average climate:	7,5	7,5	kW	
Annual energy consumption for	2732	3637	k///b	
space heating, average climate	2132	3037	kWh	
Annual electricity consumption for	1318		kWh	
water heating, average climate	13	10	KVVII	
Seasonal space heating energy	219	162	%	
efficiency, average climate:	219	102	/0	
Water heating energy efficiency,	12	7	%	
average climate:	127		/0	
Sound power level LWA indoors	38	dB		
Rated heat output, cold climate:	7,5	7,5	kW	
Rated heat output, warm climate:	7,5	7,5	kW	
Annual energy consumption for	3107	4167	kWh	
space heating, cold climate	3107	4107	KVVII	
Annual electricity consumption for	1318		kWh	
water heating, cold climate	1516		KVVII	
Annual energy consumption for	1765	2346	kWh	
space heating, warm climate	1705	2340	KVVII	
Annual electricity consumption for	1318		kWh	
water heating, warm climate				
Seasonal space heating energy	230	169	%	
efficiency, cold climate:	230	109	70	
Water heating energy efficiency, cold	127		%	
climate:	121		/0	
Seasonal space heating energy	219	163	%	
efficiency, warm climate:	۷۱۵	103	/0	
Water heating energy efficiency,	127		%	
warm climate:	12	. 1	/0	
Sound power level LWA outdoors			dB	

## Data for package fiche with SMO or VVM

Controller class	CLAS		
Controler contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	223	166	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	234	173	%
Seasonal space heating energy efficiency of package, warm climate:	223	167	%

Model(s):	NIBE S1156-8 + VPB S300		
Type of heat source/sink:	Brine/water		
Low-temperature heat pump:	No		
Equipped with supplementary heater:	Yes		
Heat pump combination heater:	Yes		
Climate condition:	Average		
Temperature application:	Medium temperature (55 °C)		
Applied standards: EN14825 - EN16147 - EN12102-1			
	Seasonal snace heating of		



Contact details	© NIBE E	nergy Syste	ems - Box	(14 - Hannabadsvägen 5 - 28521 Mar	karyd - Swe	den	
Annual electricity consumption	AEC	1318	kWh	Annual fuel consumption	AFC		GJ
Daily electricity consumption	Q <sub>elec</sub>	6,250	kWh	Daily fuel consumption	Q <sub>fuel</sub>		kWh
De the electricity of a constant	1 0 1	6.256	Land	Della facilitation and an annual in a	1 0 1		LAME
Declared load profile		XL		Water heating energy efficiency	$\eta_{\text{wh}}$	127	%
For heat pump combination heater:							
Annual energy consumption	$Q_{HE}$	3637	kWh	outdoor heat exchanger		1,68	m³/h
	****			Rated brine or water flow rate,			
Sound power level, indoors/outdoors	L <sub>WA</sub>	38/-	dB	exchanger			m³/h
		Variable		Rated water flow rate, indoor heat			111 /11
Other items Capacity control		Variable		Rated air flow rate, outdoors			m³/h
	• ск	0,010	17.00				
Crankcase heater mode	P <sub>CK</sub>	0,010	kW	Type of chergy mput		LICCUIC	
Standby mode	P <sub>SB</sub>	0,008	kW	Type of energy input	Electric		
Thermostat-off mode	P <sub>TO</sub>	0,003	kW			-/-	
Power consumption in modes other than active Off mode	<i>mode</i> P <sub>OFF</sub>	0,003	kW	Supplementary heater Rated heat output	Psup	0,0	kW
Degradation co-emitient	Cuii	0,55	<del>                                     </del>	meaning water operating illilit	WIOL	03	C
Cycling interval capacity for heating Degradation co-efficient	Pcych Cdh	0,99	kW	Cycling interval efficiency Heating water operating limit	COPcyc WTOL	65	°C
Bivalent temperature	T <sub>biv</sub>	-10	°C	Operation limit temperature	TOL	-10	°C
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		
Tj = TOL	Pdh	7,5	kW	Tj = TOL	COPd	3,03	
Tj = biv	Pdh	7,5	kW	Tj = biv	COPd	3,03	
Tj = +12 °C	Pdh	1,8	kW	Tj = +12 °C	COPd	5,40	
Ti = +7 °C	Pdh	2,6	kW	Ti = +7 °C	COPd	5,02	
Tj = +2 °C	Pdh	6,6 4,0	kW	Tj = +2 °C	COPd	4,26	
Declared capacity for part load at outdoor temperature Tj Tj = -7 °C Pdh 6,6 kW		Declared coefficient of performance for part load at outdoor temperature Tj  Tj = -7 °C COPd 3,25					
Rated heat output	Prated	7,5	kW	efficiency	$\eta_{\rm s}$	162	%
				Seasonal space heating energy			- 4
Applied standards: EN14825 - EN16147	- EN12102-	1					
Temperature application:			Medium te	emperature (55 °C)			