




**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA


**NIBE**

NIBE S1256-8



55 °C

35 °C



**A+++**

**A+++**



**36** dB



dB

■ 7,5  
■ **7,5**  
■ 7,5  
kW

■ 7,5  
■ **7,5**  
■ 7,5  
kW



2019

811/2013





**ENERG**  
енергия · ενέργεια


Y IJA  
IE IA

**NIBE**

NIBE S1256-8

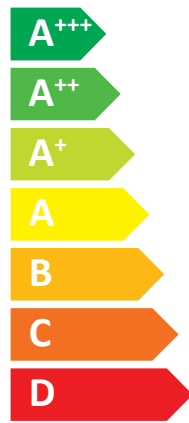

A+++

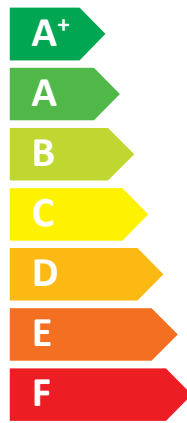

A+

36 dB

dB



- 7,5 kW
- 7,5 kW
- 7,5 kW

2019

811/2013



# ENERG

енергия · ενεργεια

Y

IJA

IE

IA

## NIBE

## NIBE S1256-8

+

+

+

+

Supplier's name:	NIBE AB		
Model:	NIBE S1256-8		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	<b>A+++</b>	<b>A+++</b>	
Water heating energy efficiency class, average climate:	<b>A+</b>		
Rated heat output, average climate:	7,5	7,5	kW
Annual energy consumption for space heating, average climate	2732	3637	kWh
Annual electricity consumption for water heating, average climate	1331		kWh
Seasonal space heating energy efficiency, average climate:	219	162	%
Water heating energy efficiency, average climate:	126		%
Sound power level LWA indoors	36		dB
Rated heat output, cold climate:	7,5	7,5	kW
Rated heat output, warm climate:	7,5	7,5	kW
Annual energy consumption for space heating, cold climate	3107	4167	kWh
Annual electricity consumption for water heating, cold climate	1331		kWh
Annual energy consumption for space heating, warm climate	1765	2346	kWh
Annual electricity consumption for water heating, warm climate	1331		kWh
Seasonal space heating energy efficiency, cold climate:	230	169	%
Water heating energy efficiency, cold climate:	126		%
Seasonal space heating energy efficiency, warm climate:	219	163	%
Water heating energy efficiency, warm climate:	126		%
Sound power level LWA outdoors			dB

**Data for package fiche with SMO or VVM**

Controller class	CLASS VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	223	166	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A+++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	234	173	%
Seasonal space heating energy efficiency of package, warm climate:	223	167	%

<b>Model(s):</b>		<b>NIBE S1256-8</b>			<b>NIBE</b>				
Type of heat source/sink:		Brine/water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825 - EN16147 - EN12102-1									
<b>Rated heat output</b>		Prated	7,5	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	162	%
<i>Declared capacity for part load at outdoor temperature Tj</i>					<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>				
Tj = -7 °C	Pdh	6,6	kW	Tj = -7 °C	COPd	3,25			
Tj = +2 °C	Pdh	4,0	kW	Tj = +2 °C	COPd	4,26			
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C	COPd	5,02			
Tj = +12 °C	Pdh	1,8	kW	Tj = +12 °C	COPd	5,40			
Tj = biv	Pdh	7,5	kW	Tj = biv	COPd	3,03			
Tj = TOL	Pdh	7,5	kW	Tj = TOL	COPd	3,03			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd				
Bivalent temperature					Operation limit temperature				
	T <sub>biv</sub>	-10	°C		TOL	-10	°C		
Cycling interval capacity for heating					Cycling interval efficiency				
	P <sub>cyh</sub>		kW		COP <sub>cyh</sub>				-
Degradation co-efficient					Heating water operating limit				
	Cdh	0,99	-		WTOL	65	°C		
<i>Power consumption in modes other than active mode</i>					<i>Supplementary heater</i>				
Off mode					Rated heat output				
	P <sub>OFF</sub>	0,003	kW		P <sub>sup</sub>	0,0	kW		
Thermostat-off mode									
	P <sub>TO</sub>	0,003	kW	Type of energy input					
Standby mode					Electric				
	P <sub>SB</sub>	0,008	kW						
Crankcase heater mode									
	P <sub>CK</sub>	0,010	kW						
<i>Other items</i>									
Capacity control					Rated air flow rate, outdoors				
		Variable							m <sup>3</sup> /h
Sound power level, indoors/outdoors					Rated water flow rate, indoor heat exchanger				
	L <sub>WA</sub>	36,1/-	dB						m <sup>3</sup> /h
Annual energy consumption					Rated brine or water flow rate, outdoor heat exchanger				
	Q <sub>HE</sub>	3637	kWh			1,68	m <sup>3</sup> /h		
<i>For heat pump combination heater:</i>									
<b>Declared load profile</b>		<b>XL</b>			<b>Water heating energy efficiency</b>		$\eta_{wh}$	126	%
Daily electricity consumption					Daily fuel consumption				
	Q <sub>elec</sub>	6,329	kWh		Q <sub>fuel</sub>				kWh
Annual electricity consumption					Annual fuel consumption				
	AEC	1331	kWh		AFC				GJ
<b>Contact details</b>		<b>© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden</b>							