



# ENERGY

**NIBE**

NIBE S1256-18



55 °C

35 °C



**A+++**

**A+++**



**39** dB



dB

■ 15  
■ **15**  
■ 15  
kW

■ 15  
■ **15**  
■ 15  
kW



2019



811/2013




# ENERGY

**NIBE**



NIBE S1256-18

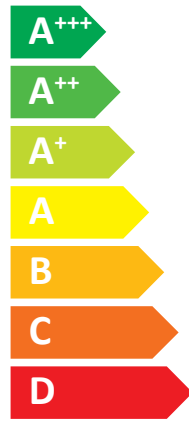

**A+++**

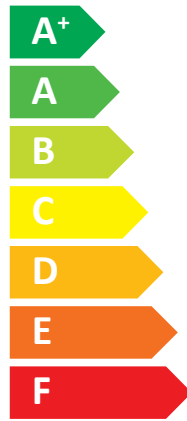

**A+**



2019


811/2013



# ENERGY

**NIBE**

NIBE S1256-18



A+++



A+



A+++

A++

A+

A

B

C

D


E

F


G

A+++

+



+



+



+



A+++

A++

A+

A

B

C

D

E

F

G

A+

Supplier's name:	NIBE AB		
Model:	NIBE S1256-18		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	<b>A+++</b>	<b>A+++</b>	
Water heating energy efficiency class, average climate:	<b>A+</b>		
Rated heat output, average climate:	15,1	15,1	kW
Annual energy consumption for space heating, average climate	5252	7064	kWh
Annual electricity consumption for water heating, average climate	1342		kWh
Seasonal space heating energy efficiency, average climate:	230	169	%
Water heating energy efficiency, average climate:	125		%
Sound power level LWA indoors	39		dB
Rated heat output, cold climate:	15,1	15,1	kW
Rated heat output, warm climate:	15,1	15,1	kW
Annual energy consumption for space heating, cold climate	5988	8098	kWh
Annual electricity consumption for water heating, cold climate	1342		kWh
Annual energy consumption for space heating, warm climate	3352	4515	kWh
Annual electricity consumption for water heating, warm climate	1342		kWh
Seasonal space heating energy efficiency, cold climate:	241	176	%
Water heating energy efficiency, cold climate:	125		%
Seasonal space heating energy efficiency, warm climate:	233	171	%
Water heating energy efficiency, warm climate:	125		%
Sound power level LWA outdoors			dB

**Data for package fiche with SMO or VVM**

Controller class	CLASS VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	234	173	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A+++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	245	180	%
Seasonal space heating energy efficiency of package, warm climate:	237	175	%

<b>Model(s):</b>		<b>NIBE S1256-18</b>		<b>NIBE</b>						
Type of heat source/sink:		Brine/water								
Low-temperature heat pump:		No								
Equipped with supplementary heater:		Yes								
Heat pump combination heater:		Yes								
Climate condition:		Average								
Temperature application:		Low temperature (35 °C)								
Applied standards: EN14825 - EN16147 - EN12102-1										
<b>Rated heat output</b>		Prated	15,1	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	230	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>						
Tj = -7 °C	Pdh	13,4	kW	Tj = -7 °C	COPd	4,89				
Tj = +2 °C	Pdh	8,2	kW	Tj = +2 °C	COPd	5,93				
Tj = +7 °C	Pdh	5,3	kW	Tj = +7 °C	COPd	6,73				
Tj = +12 °C	Pdh	3,5	kW	Tj = +12 °C	COPd	6,98				
Tj = biv	Pdh	15,1	kW	Tj = biv	COPd	4,64				
Tj = TOL	Pdh	15,1	kW	Tj = TOL	COPd	4,64				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd					
Bivalent temperature				T <sub>biv</sub>	-10	°C	Operation limit temperature			
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency		COP <sub>cyh</sub>	-
Degradation co-efficient				Cdh	1,00	-	Heating water operating limit		WTOL	65
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>						
Off mode	P <sub>OFF</sub>	0,004	kW	Rated heat output		P <sub>sup</sub>	0,0	kW		
Thermostat-off mode	P <sub>TO</sub>	0,000	kW							
Standby mode	P <sub>SB</sub>	0,009	kW	Type of energy input		Electric				
Crankcase heater mode	P <sub>CK</sub>	0,012	kW							
<i>Other items</i>										
Capacity control	Variable			Rated air flow rate, outdoors				m <sup>3</sup> /h		
Sound power level, indoors/outdoors	L <sub>WA</sub>		dB	Rated water flow rate, indoor heat exchanger				m <sup>3</sup> /h		
Annual energy consumption	Q <sub>HE</sub>	5252	kWh	Rated brine or water flow rate, outdoor heat exchanger			3,46	m <sup>3</sup> /h		
<i>For heat pump combination heater:</i>										
<b>Declared load profile</b>		<b>XL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	125	%		
Daily electricity consumption	Q <sub>elec</sub>	6,333	kWh	Daily fuel consumption		Q <sub>fuel</sub>		kWh		
Annual electricity consumption	AEC	1342	kWh	Annual fuel consumption		AFC		GJ		
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								