



ENERG
енергия · ενέργεια




NIBE

AMS 10-12 + BA-SVM10-200-12 E



55 °C

35 °C



A++

A++



31 dB



58 dB

■ 13
■ **10**
■ 12
kW

■ 12
■ **12**
■ 12
kW



2019

811/2013




ENERG
енергия · ενέργεια




NIBE

AMS10-12 + BA-SVM10-200-12 E

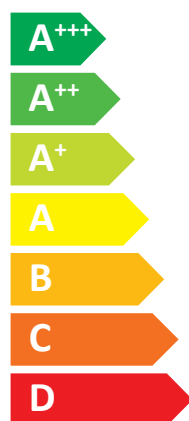

A++

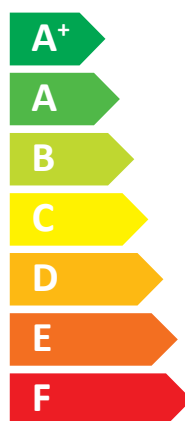

A



31 dB



58 dB



- 13 kW
- 10kW**
- 12 kW

2019

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

AMS10-12 + BA-SVM10-200-12 E



A⁺⁺



A



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D


E

F

G

A⁺⁺

+



+



+



+



A⁺⁺⁺

A⁺⁺

A⁺

A

B

C

D

E

F

G

A

Supplier's name:	NIBE AB		
Model:	AMS10-12 + BA-SVM10-200-12 E		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	12	10	kW
Annual energy consumption for space heating, average climate	5361	6137	kWh
Annual electricity consumption for water heating, average climate	1557		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	108		%
Sound power level LWA indoors	31		dB
Rated heat output, cold climate:	12	13	kW
Rated heat output, warm climate:	12	12	kW
Annual energy consumption for space heating, cold climate	7920	11461	kWh
Annual electricity consumption for water heating, cold climate	1941		kWh
Annual energy consumption for space heating, warm climate	2765	3445	kWh
Annual electricity consumption for water heating, warm climate	1278		kWh
Seasonal space heating energy efficiency, cold climate:	140	109	%
Water heating energy efficiency, cold climate:	86		%
Seasonal space heating energy efficiency, warm climate:	229	183	%
Water heating energy efficiency, warm climate:	131		%
Sound power level LWA outdoors	58		dB

Data for package fiche

Controller class	CLASS VI		
Controler contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	144	113	%
Seasonal space heating energy efficiency of package, warm climate:	233	187	%

Model(s):		AMS10-12 + BA-SVM10-200-12 E				NIBE				
Type of heat source/sink:		Air/water								
Low-temperature heat pump:		No								
Equipped with supplementary heater:		Yes								
Heat pump combination heater:		Yes								
Climate condition:		Average								
Temperature application:		Medium temperature (55 °C)								
Applied standards: EN 14825:2022, EN 16147:2017+A1:2022, EN 12102-1:2022										
Rated heat output		Prated	10,0	kW		Seasonal space heating energy efficiency		ηs	132	%
Declared capacity for part load at outdoor temperature Tj						Declared coefficient of performance for part load at outdoor temperature Tj				
Tj = -7 °C	Pdh	8,9	kW		Tj = -7 °C	COPd	1,99			
Tj = +2 °C	Pdh	5,5	kW		Tj = +2 °C	COPd	3,22			
Tj = +7 °C	Pdh	3,6	kW		Tj = +7 °C	COPd	4,61			
Tj = +12 °C	Pdh	5,0	kW		Tj = +12 °C	COPd	6,91			
Tj = biv	Pdh	9,2	kW		Tj = biv	COPd	1,90			
Tj = TOL	Pdh	8,1	kW		Tj = TOL	COPd	1,92			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd				
Bivalent temperature	Tbiv	-8	°C		Operation limit temperature		TOL	-10	°C	
Cycling interval capacity for heating	Pcych		kW		Cycling interval efficiency		COPcyc		-	
Degradation co-efficient	Cdh	0,98	-		Heating water operating limit		WTOL	58	°C	
Power consumption in modes other than active mode					Supplementary heater					
Off mode	POFF	0,002	kW		Rated heat output		Psup	1,9	kW	
Thermostat-off mode	PTO	0,014	kW							
Standby mode	PSB	0,015	kW		Type of energy input		Electric			
Crankcase heater mode	PCK	0,035	kW							
Other items										
Capacity control	Variable				Rated air flow rate, outdoors			4380	m³/h	
Sound power level, indoors/outdoors	LWA	31/58	dB		Rated water flow rate, indoor heat exchanger			0,86	m³/h	
Annual energy consumption	QHE	6137	kWh		Rated brine or water flow rate, outdoor heat exchanger				m³/h	
For heat pump combination heater:										
Declared load profile		XL			Water heating energy efficiency		ηwh	108	%	
Daily electricity consumption	Qelec	7,409	kWh		Daily fuel consumption		Qfuel		kWh	
Annual electricity consumption	AEC	1557	kWh		Annual fuel consumption		AFC		GJ	
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden								