



ENERG

енергия · ενεργεια




NIBE

AMS10-8 + BA-SVM10-200/12 R



A⁺⁺

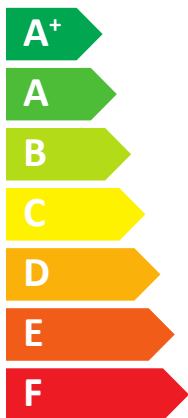

A



35 dB



55 dB



10 kW

07 kW

08 kW



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

AMS10-8 + BA-SVM10-200/12 R

A++

A

XL

+

+

+

+

X

A+++

A++

A+

A

B

C

D

E

F

G

A++

XL

A+++

A++

A+

A

B

C

D

E

F


G

A

Supplier's name:	NIBE		
Model:	AMS10-8 + BA-SVM10-200/12 R		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	8,2	7,0	kW
Annual energy consumption for space heating, average climate	3882	4447	kWh
Annual electricity consumption for water heating, average climate	1689		kWh
Seasonal space heating energy efficiency, average climate:	172	127	%
Water heating energy efficiency, average climate:	99		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	9,0	10,0	kW
Rated heat output, warm climate:	8,0	8,0	kW
Annual energy consumption for space heating, cold climate	6264	8844	kWh
Annual electricity consumption for water heating, cold climate	1886		kWh
Annual energy consumption for space heating, warm climate	1879	2333	kWh
Annual electricity consumption for water heating, warm climate	1540		kWh
Seasonal space heating energy efficiency, cold climate:	139	108	%
Water heating energy efficiency, cold climate:	89		%
Seasonal space heating energy efficiency, warm climate:	225	180	%
Water heating energy efficiency, warm climate:	109		%
Sound power level LWA outdoors	55		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	176	131	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	143	112	%
Seasonal space heating energy efficiency of package, warm climate:	229	184	%

Model(s):		AMS10-8 + BA-SVM10-200/12 R										
Type of heat source/sink:		Air-to-water										
Low-temperature heat pump:		No										
Equipped with supplementary heater:		Yes										
Heat pump combination heater:		Yes										
Climate condition:		Average										
Temperature application:		Medium temperature (55 °C)										
Applied standards: EN14825, EN16147												
Rated heat output		Prated	7,0	kW	Seasonal space heating energy efficiency		η_s	127	%			
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>								
Tj = -7 °C	Pdh	6,3	kW	Tj = -7 °C	COPd	1,94	-					
Tj = +2 °C	Pdh	3,9	kW	Tj = +2 °C	COPd	3,11	-					
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C	COPd	4,42	-					
Tj = +12 °C	Pdh	3,7	kW	Tj = +12 °C	COPd	5,93	-					
Tj = biv	Pdh	6,6	kW	Tj = biv	COPd	1,83	-					
Tj = TOL	Pdh	5,9	kW	Tj = TOL	COPd	1,86	-					
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-					
Bivalent temperature				T _{biv}	-8,6	°C	Operation limit temperature			TOL	-10	°C
Cycling interval capacity for heating				P _{cyh}		kW	Cycling interval efficiency			COP _{cyh}		-
Degradation co-efficient				C _{dh}	0,97	-	Heating water operating limit			WTOL	58	°C
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>								
Off mode		P _{OFF}	0,002	kW	Rated heat output		P _{sup}	1,1	kW			
Thermostat-off mode		P _{TO}	0,01	kW	Type of energy input		Electric					
Standby mode		P _{SB}	0,015	kW								
Crankcase heater mode		P _{CK}	0,03	kW								
<i>Other items</i>												
Capacity control		variable		Rated air flow rate, outdoors			3000	m ³ /h				
Sound power level, indoors/outdoors		L _{WA}	35/55	dB	Rated water flow rate, indoor heat exchanger			0,60	m ³ /h			
Annual energy consumption		Q _{HE}	4447	kWh	Rated brine or water flow rate, outdoor heat exchanger				m ³ /h			
<i>For heat pump combination heater:</i>												
Declared load profile		XL		Water heating energy efficiency		η_{wh}	99	%				
Daily electricity consumption		Q _{elec}	7,69	kWh	Daily fuel consumption		Q _{fuel}		kWh			
Annual electricity consumption		AEC	1689	kWh	Annual fuel consumption		AFC		GJ			
Approved by:												
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden										





ENERG

енергия · ενεργεια




NIBE

AMS10-12 + BA-SVM10-200/12 R

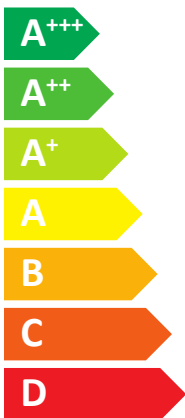

A⁺⁺

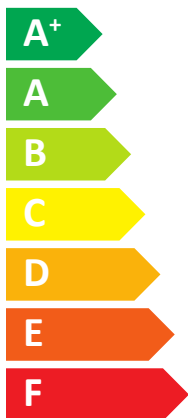

A

Two icons showing sound power levels. The top icon shows a speaker inside a house with the value 35 dB. The bottom icon shows a speaker outside a house with the value 58 dB.



A legend box with three entries: a dark blue square next to '13 kW', a medium blue square next to '10 kW', and a light blue square next to '12 kW'.



ENERG

енергия · ενέργεια

Y

IJA

IE

IA

NIBE

AMS10-12 + BA-SVM10-200/12 R

Energy label icons: water heater, A⁺⁺ rating, radiator, A rating, tap with XL label.

Feature icons: solar panel, hot water tank, keypad, water heater.


Energy efficiency scale with A⁺⁺ label.

Energy efficiency scale with A label.

Supplier's name:	NIBE		
Model:	AMS10-12 + BA-SVM10-200/12 R		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	11,5	10,0	kW
Annual energy consumption for space heating, average climate	5382	6136	kWh
Annual electricity consumption for water heating, average climate	1702		kWh
Seasonal space heating energy efficiency, average climate:	174	132	%
Water heating energy efficiency, average climate:	98		%
Sound power level LWA indoors	35		dB
Rated heat output, cold climate:	11,5	13,0	kW
Rated heat output, warm climate:	12,0	12,0	kW
Annual energy consumption for space heating, cold climate	7798	11197	kWh
Annual electricity consumption for water heating, cold climate	1904		kWh
Annual energy consumption for space heating, warm climate	2759	3419	kWh
Annual electricity consumption for water heating, warm climate	1551		kWh
Seasonal space heating energy efficiency, cold climate:	142	111	%
Water heating energy efficiency, cold climate:	88		%
Seasonal space heating energy efficiency, warm climate:	229	185	%
Water heating energy efficiency, warm climate:	108		%
Sound power level LWA outdoors	58		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	178	136	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	146	115	%
Seasonal space heating energy efficiency of package, warm climate:	233	189	%

Model(s):				AMS10-12 + BA-SVM10-200/12 R							
Type of heat source/sink:				Air-to-water							
Low-temperature heat pump:				No							
Equipped with supplementary heater:				Yes							
Heat pump combination heater:				Yes							
Climate condition:				Average							
Temperature application:				Medium temperature (55 °C)							
Applied standards: EN14825, EN16147											
Rated heat output				Prated	10,0	kW		Seasonal space heating energy efficiency			
								η_s	132	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>								<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>			
Tj = -7 °C	Pdh	8,9	kW		Tj = -7 °C	COPd	1,99	-			
Tj = +2 °C	Pdh	5,5	kW		Tj = +2 °C	COPd	3,22	-			
Tj = +7 °C	Pdh	3,5	kW		Tj = +7 °C	COPd	4,61	-			
Tj = +12 °C	Pdh	5,0	kW		Tj = +12 °C	COPd	6,25	-			
Tj = biv	Pdh	9,2	kW		Tj = biv	COPd	1,90	-			
Tj = TOL	Pdh	8,1	kW		Tj = TOL	COPd	1,92	-			
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW		Tj = -15 °C (if TOL < -20 °C)	COPd		-			
Bivalent temperature				T _{biv}	-7,9	°C		Operation limit temperature			
Cycling interval capacity for heating				P _{cyh}		kW		Cycling interval efficiency			
Degradation co-efficient				C _{dh}	0,98	-		Heating water operating limit			
								WTOL	58	°C	
<i>Power consumption in modes other than active mode</i>								<i>Supplementary heater</i>			
Off mode				P _{OFF}	0,002	kW		Rated heat output			
Thermostat-off mode				P _{TO}	0,014	kW		P _{sup}			
Standby mode				P _{SB}	0,015	kW		1,9			
Crankcase heater mode				P _{CK}	0,035	kW		Type of energy input			
								Electric			
<i>Other items</i>											
Capacity control				variable				Rated air flow rate, outdoors			
									4380	m ³ /h	
Sound power level, indoors/outdoors				L _{WA}	35/58	dB		Rated water flow rate, indoor heat exchanger			
									0,86	m ³ /h	
Annual energy consumption				Q _{HE}	6136	kWh		Rated brine or water flow rate, outdoor heat exchanger			
										m ³ /h	
<i>For heat pump combination heater:</i>											
Declared load profile				XL				Water heating energy efficiency			
								η_{wh}	98	%	
Daily electricity consumption				Q _{elec}	7,75	kWh		Daily fuel consumption			
Annual electricity consumption				AEC	1702	kWh		Q _{fuel}			
								AFC			
								kJ			
Approved by:											
Contact details				© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							