




ENERG
енергия · ενεργεια

Y IJA
IE IA

NIBE

NIBE F1155-6 W/W



55 °C

35 °C



A++

A++



42 dB



dB

■ 7
■ 7
■ 7
kW

■ 7
■ 7
■ 7
kW



2015

811/2013



ENERG
енергия · ενεργεια

Y IJA
IE IA

NIBE


NIBE F1155-6 W/W + VPB300




55°C





XL

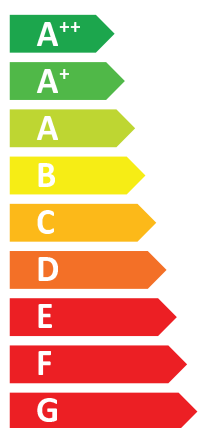

A++

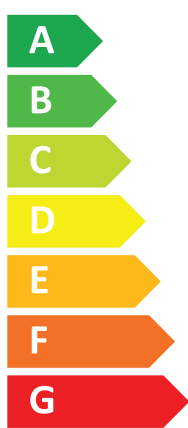

A

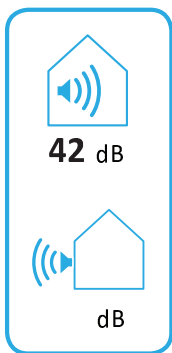

2015

811/2013



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

NIBE

NIBE F1155-6 W/W

 35 °C



A⁺⁺

A⁺⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+





ENERG

енергия · ενέργεια

Y






IJA


IE


IA


NIBE


NIBE F1155-6 W/W + VPB300








+ 






+ 

+ 

+ 



55 °C








Product fiche

Supplier's name:	NIBE		
Model:	NIBE F1155-6 W/W + VPB 300		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	7	7	kW
Annual energy consumption for space heating, average climate	2078	2611	kWh
Annual electricity consumption for water heating, average climate	1476		kWh
Seasonal space heating energy efficiency, average climate:	270	214	%
Water heating energy efficiency, average climate:	114		%
Sound power level LWA indoors	42	42	dB
Rated heat output, cold climate:	7	7	kW
Rated heat output, warm climate:	7	7	kW
Annual energy consumption for space heating, cold climate	2378	3005	kWh
Annual electricity consumption for water heating, cold climate	1476		kWh
Annual energy consumption for space heating, warm climate	1349	1696	kWh
Annual electricity consumption for water heating, warm climate	1476		kWh
Seasonal space heating energy efficiency, cold climate:	282	222	%
Water heating energy efficiency, cold climate:	114		%
Seasonal space heating energy efficiency, warm climate:	269	213	%
Water heating energy efficiency, warm climate:	114		%
Sound power level LWA outdoors	-	-	dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4		%
Seasonal space heating energy efficiency of package, average climate:	274	218	%
Seasonal space heating energy efficiency class for package, average climate:	A+++	A+++	%
Seasonal space heating energy efficiency of package, cold climate:	286	226	%
Seasonal space heating energy efficiency of package, warm climate:	273	217	%

Model(s):		NIBE F1155-6 W/W + VPB 300							
Type of heat source/sink:		Water-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825, EN14511, EN16147 and EN12102 (sound)									
Rated heat output		Prated	7,0	kW	Seasonal space heating energy efficiency		η_s	214	%
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>					
Tj = -7 °C	Pdh	6,3	kW	Tj = -7 °C	COPd	4,52	kW		
Tj = +2 °C	Pdh	3,9	kW	Tj = +2 °C	COPd	5,62	kW		
Tj = +7 °C	Pdh	2,5	kW	Tj = +7 °C	COPd	6,34	kW		
Tj = +12 °C	Pdh	1,6	kW	Tj = +12 °C	COPd	6,57	kW		
Tj = biv	Pdh	6,9	kW	Tj = biv	COPd	4,21	kW		
Tj = TOL	Pdh	6,9	kW	Tj = TOL	COPd	4,21	kW		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		kW		
Bivalent temperature				T _{biv}	-10	°C	Operation limit temperature		
Cycling interval capacity for heating				P _{cyh}		kW	Cycling interval efficiency		
Degradation co-efficient				Cdh	0,97	-	Heating water operating limit		
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>					
Off mode	P _{OFF}	0,002	kW	Rated heat output		P _{sup}	0,1	kW	
Thermostat-off mode	P _{TO}	0,015	kW						
Standby mode	P _{SB}	0,007	kW	Type of energy input		Electric			
Crankcase heater mode	P _{CK}	0,009	kW						
<i>Other items</i>									
Capacity control		variable		Rated air flow rate, outdoors					m ³ /h
Sound power level, indoors/outdoors		L _{WA}	42/-	dB	Rated brine or water flow rate, outdoor heat exchanger			1,07	m ³ /h
Annual energy consumption		Q _{HE}	2611	kWh					
<i>For heat pump combination heater:</i>									
Declared load profile		XL		Water heating energy efficiency		η_{wh}	114	%	
Daily electricity consumption		Q _{elec}	6,72	kWh	Daily fuel consumption		Q _{fuel}		kWh
Annual electricity consumption		AEC	1476	kWh	Annual fuel consumption		AFC		GJ
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							