




**ENERG**  
енергия · ενεργεια

Y IJA  
IE IA


**NIBE**

NIBE S1156-8



55 °C

35 °C



**A+++**

**A+++**



**36** dB



dB

■ 7,5  
■ **7,5**  
■ 7,5  
kW

■ 7,5  
■ **7,5**  
■ 7,5  
kW



2019

811/2013





**ENERG**  
енергия · ενέργεια




**NIBE**



NIBE S1156-8 + VPB S300

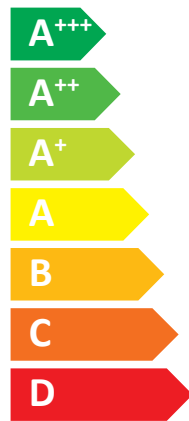

**A+++**

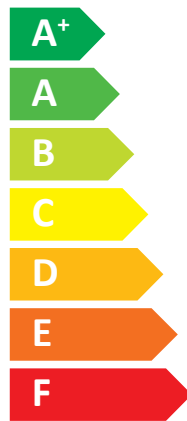

**A+**



2019

811/2013



# ENERG

енергия · ενέργεια

Y

IJA

IE

IA

## NIBE

### NIBE S1156-8 + VPB S300

+

+

+

+

Supplier's name:	NIBE AB		
Model:	NIBE S1156-8 + VPB S300		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	<b>A+++</b>	<b>A+++</b>	
Water heating energy efficiency class, average climate:	<b>A+</b>		
Rated heat output, average climate:	7,5	7,5	kW
Annual energy consumption for space heating, average climate	2732	3637	kWh
Annual electricity consumption for water heating, average climate	1318		kWh
Seasonal space heating energy efficiency, average climate:	219	162	%
Water heating energy efficiency, average climate:	127		%
Sound power level LWA indoors	36		dB
Rated heat output, cold climate:	7,5	7,5	kW
Rated heat output, warm climate:	7,5	7,5	kW
Annual energy consumption for space heating, cold climate	3107	4167	kWh
Annual electricity consumption for water heating, cold climate	1318		kWh
Annual energy consumption for space heating, warm climate	1765	2346	kWh
Annual electricity consumption for water heating, warm climate	1318		kWh
Seasonal space heating energy efficiency, cold climate:	230	169	%
Water heating energy efficiency, cold climate:	127		%
Seasonal space heating energy efficiency, warm climate:	219	163	%
Water heating energy efficiency, warm climate:	127		%
Sound power level LWA outdoors			dB

**Data for package fiche with SMO or VVM**

Controller class	CLASS VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	223	166	%
Seasonal space heating energy efficiency class for package, average climate:	<b>A+++</b>	<b>A+++</b>	%
Seasonal space heating energy efficiency of package, cold climate:	234	173	%
Seasonal space heating energy efficiency of package, warm climate:	223	167	%

<b>Model(s):</b>		<b>NIBE S1156-8 + VPB S300</b>		<b>NIBE</b>						
Type of heat source/sink:		Brine/water								
Low-temperature heat pump:		No								
Equipped with supplementary heater:		Yes								
Heat pump combination heater:		Yes								
Climate condition:		Average								
Temperature application:		Medium temperature (55 °C)								
Applied standards: EN14825 - EN16147 - EN12102-1										
<b>Rated heat output</b>		Prated	7,5	kW	<b>Seasonal space heating energy efficiency</b>		$\eta_s$	162	%	
<i>Declared capacity for part load at outdoor temperature Tj</i>				<i>Declared coefficient of performance for part load at outdoor temperature Tj</i>						
Tj = -7 °C	Pdh	6,6	kW	Tj = -7 °C	COPd	3,25				
Tj = +2 °C	Pdh	4,0	kW	Tj = +2 °C	COPd	4,26				
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C	COPd	5,02				
Tj = +12 °C	Pdh	1,8	kW	Tj = +12 °C	COPd	5,40				
Tj = biv	Pdh	7,5	kW	Tj = biv	COPd	3,03				
Tj = TOL	Pdh	7,5	kW	Tj = TOL	COPd	3,03				
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd					
Bivalent temperature				T <sub>biv</sub>	-10	°C	Operation limit temperature			
Cycling interval capacity for heating				P <sub>cyh</sub>		kW	Cycling interval efficiency			
Degradation co-efficient				Cdh	0,99	-	Heating water operating limit			
<i>Power consumption in modes other than active mode</i>				<i>Supplementary heater</i>						
Off mode	P <sub>OFF</sub>	0,003	kW	Rated heat output		P <sub>sup</sub>	0,0	kW		
Thermostat-off mode	P <sub>TO</sub>	0,003	kW							
Standby mode	P <sub>SB</sub>	0,008	kW	Type of energy input		Electric				
Crankcase heater mode	P <sub>CK</sub>	0,010	kW							
<i>Other items</i>										
Capacity control				Variable		Rated air flow rate, outdoors				
Sound power level, indoors/outdoors				L <sub>WA</sub>	36,1/-	dB	Rated water flow rate, indoor heat exchanger			
Annual energy consumption				Q <sub>HE</sub>	3637	kWh	Rated brine or water flow rate, outdoor heat exchanger		1,68	m <sup>3</sup> /h
<i>For heat pump combination heater:</i>										
<b>Declared load profile</b>		<b>XL</b>		<b>Water heating energy efficiency</b>		$\eta_{wh}$	127	%		
				Daily electricity consumption		Q <sub>elec</sub>	6,250	kWh		
				Annual electricity consumption		AEC	1318	kWh		
				Daily fuel consumption		Q <sub>fuel</sub>		kWh		
				Annual fuel consumption		AFC		GJ		
<b>Contact details</b>		© NIBE Energy Systems - Box 14 - Hannabadvägen 5 - 28521 Markaryd - Sweden								